



RAZER AETHER LIGHT STRIP

MASTER GUIDE


Make your gamer room truly shine with Razer Aether Lights. Powered by Razer Chroma™ RGB, customize and control them all from one convenient app to create the perfect setting for any scenario.

CONTENTS

1. WHAT'S INSIDE	3
2. WHAT'S NEEDED	4
3. LET'S GET YOU COVERED.....	4
4. TECHNICAL SPECIFICATIONS	5
5. SETTING IT UP	6
6. CUSTOMIZING THE LIGHTING	7
7. USING THE LIGHT STRIP	10
8. CONFIGURING YOUR RAZER AETHER LIGHT STRIP VIA RAZER SYNAPSE	13
9. SAFETY AND MAINTENANCE.....	26
10. LEGALESE.....	27

1. WHAT'S INSIDE



- Razer Aether Light Strip

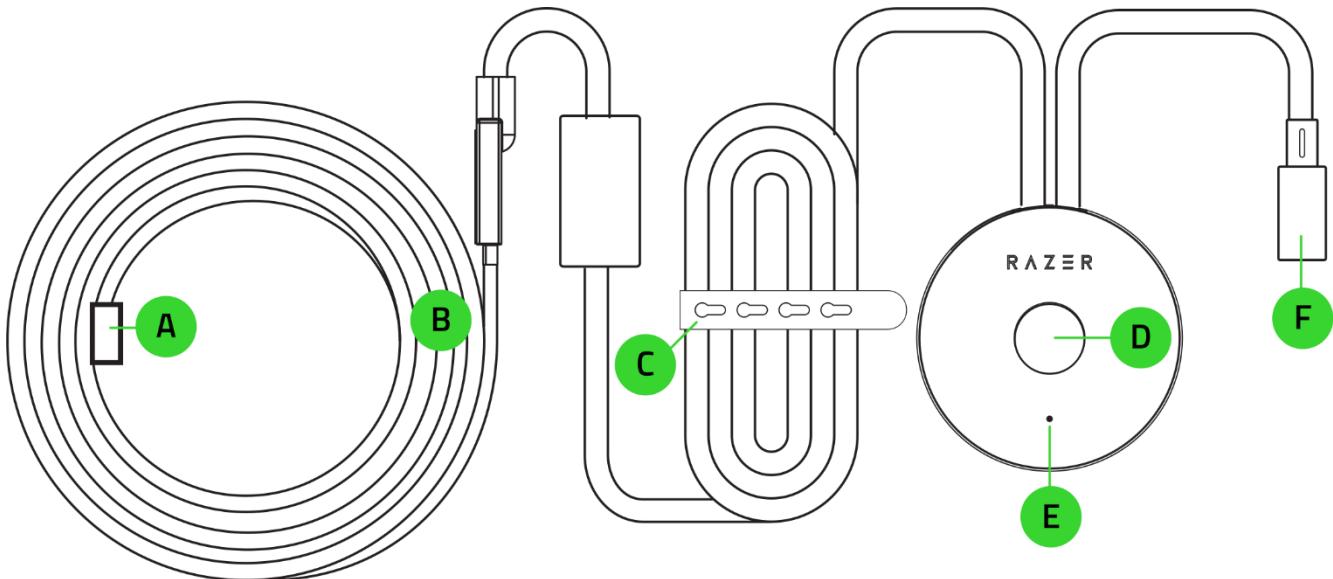

- A. Extender port
- B. 2 m light strip
- C. Cable tie

- D. Multi-function button
- E. Status indicator
- F. Power port

- Power adapter with interchangeable plugs*

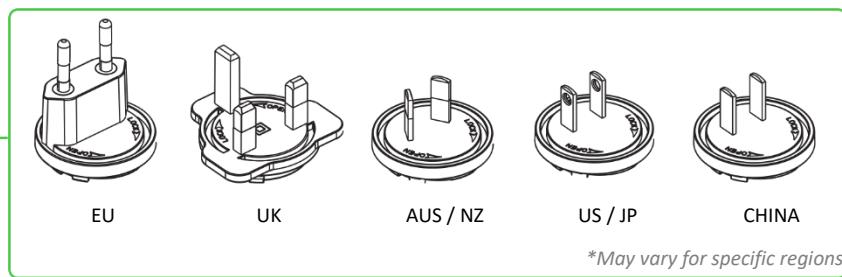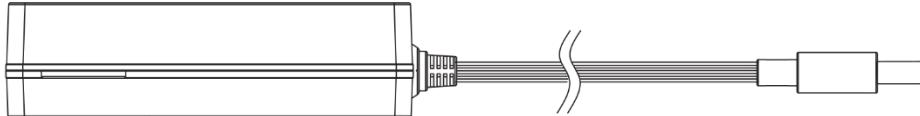

*May vary for specific regions

- Important Product Information Guide

2. WHAT'S NEEDED

PRODUCT REQUIREMENTS

- 2.4 GHz WiFi network (WPA / WPA2 encryption)
- WiFi-enabled PC / Laptop (Windows® 10 64-bit or higher) or iOS / Android device**

RAZER GAMER ROOM APP REQUIREMENTS

- iOS 16.4 / Android 9 Pie (or higher) device with Bluetooth connectivity**
- Internet connection for app installation

RAZER SYNAPSE REQUIREMENTS

- Windows® 10 64-bit (or higher)
- Internet connection for software installation

***Bluetooth connectivity is required for initial setup only.*

3. LET'S GET YOU COVERED



Register your product and score exclusive benefits
[**razerid.razer.com/warranty**](http://razerid.razer.com/warranty)




4. TECHNICAL SPECIFICATIONS


- Length: 2 m
- Extension capability: Up to 10 m total via 8 x 1 m extension kits
- RGB Lighting: Razer Chroma RGB
- LED Lifetime: 25,000 hours
- Lighting Module
 - Rated Power: 39 W
 - Input Voltage: 13 V
- LED Strip (2 m)
 - Rated Power: 8 W
 - Input Voltage: 13 V
- LED Strip (1 m)
 - Rated Power: 4 W
 - Input Voltage: 13 V
- Connection Protocol: 802.11b/g/n 2.4 GHz
- Voice Assistant: Amazon Alexa, Google Assistant
- Pairing: Bluetooth
- Works with Matter™
- Power Adapter
 - Input 100-240 V-50/60 Hz
 - Output: 13 V 4 A (52 W)

5. SETTING IT UP

1. Use the adhesive layer on the light strip to fasten it on a clean, dry, and flat surface.

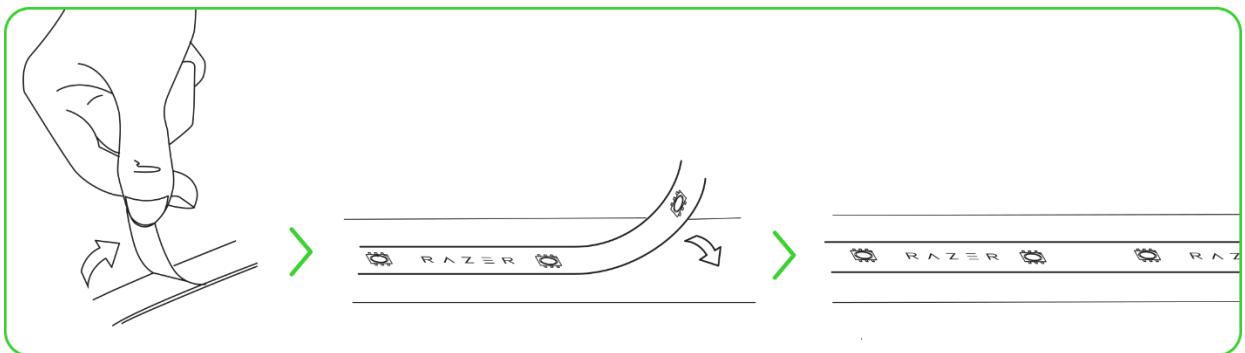

2. Attach the correct AC plug for your region to the power adapter, then connect it to the light strip's power port and plug it into a power outlet.

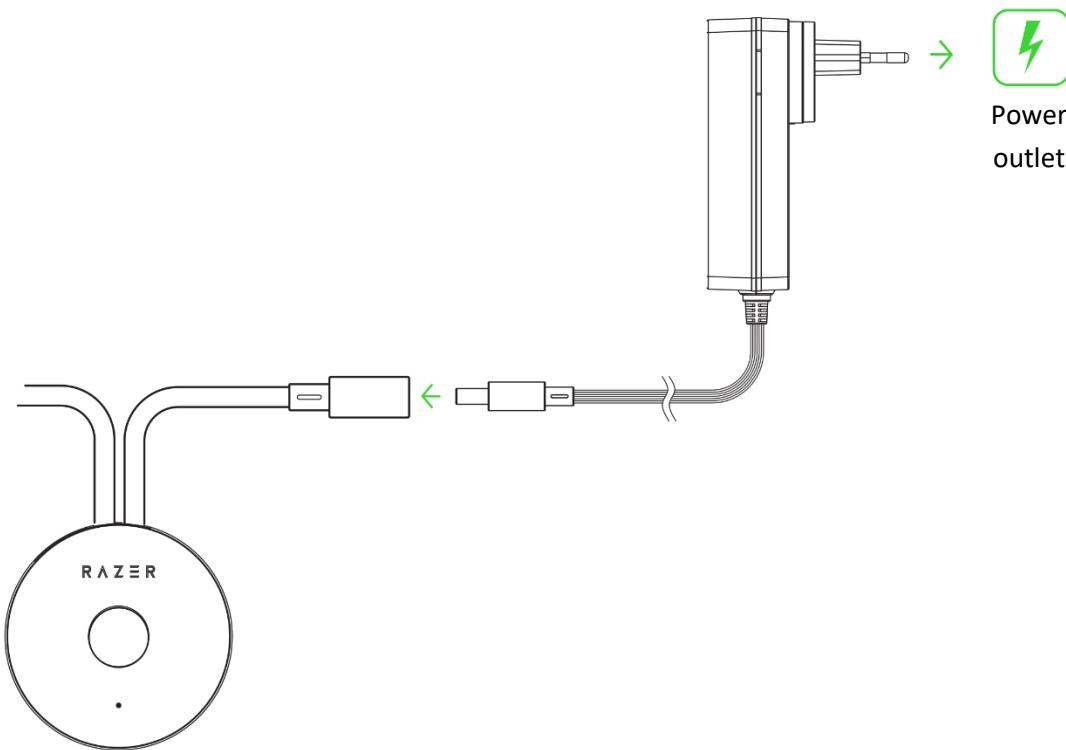

3. Strap the cables as needed using the cable tie to organize your setup.

6. CUSTOMIZING THE LIGHTING

A. VIA MOBILE DEVICE USING THE RAZER GAMER ROOM APP (REQUIRED)


1. Download the Razer Gamer Room app on your mobile device.



2. Press the multi-function button to power on the light strip. The status indicator will blink in blue to show that the light strip is in pairing mode.



3. Launch the app, follow the onscreen instructions and scan the Matter™ QR code on the light strip. The status indicator will turn solid green to show that the light strip is connected to the app.

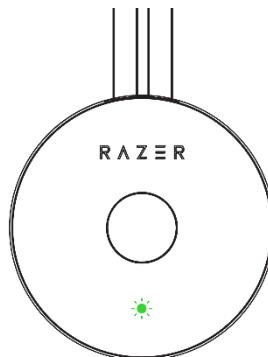

i Please make sure that your mobile device is on your preferred 2.4 GHz network.


You can now customize the Razer Aether Light Strip using the Razer Gamer Room app.

B. VIA PC / LAPTOP USING THE RAZER SYNAPSE APP


i Before proceeding, make sure the light strip is already set up on your network (via the Razer Gamer Room app) and your PC is on the same network.

1. Go to razer.com/synapse to download and launch Razer Synapse. For existing users, update Razer Synapse to its latest version.

! Registering for a Razer ID account is recommended but optional. You may continue as a guest; however, you won't be able to store any of your settings on the cloud.
2. Press the multi-function button to power on the light strip. The status indicator will show green to indicate that the light strip is connected to your network.

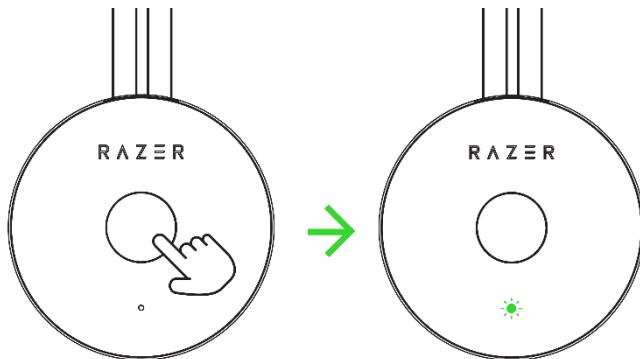

3. On Razer Synapse, click **Add WiFi Device**, choose **Gamer Room Devices**, select your device, and follow the onscreen instructions.

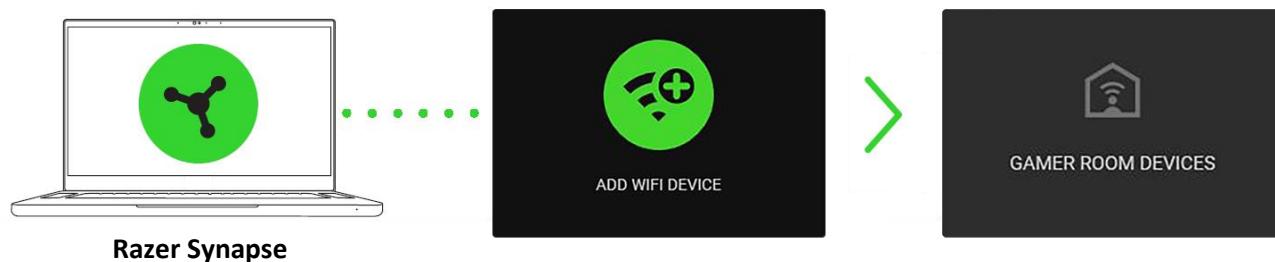

4. Update when prompted and wait for Razer Synapse to set up the light strip. The Razer Synapse Dashboard will show the **Razer Aether Light Strip** on the Devices list.



You can now customize the Razer Aether Light Strip using Razer Synapse.


REACTIVATING PAIRING MODE

Pairing mode is required when setting up the light strip from the Razer Gamer Room app. When unpaired, the light strip enters pairing mode upon power on. If left unpaired for 5 minutes, pairing mode will deactivate, and the status indicator will turn yellow. To reactivate pairing mode, switch off and on the light strip's power supply.

7. USING THE LIGHT STRIP


POWER ON/OFF

Press the multi-function button to power on or power off the light strip.

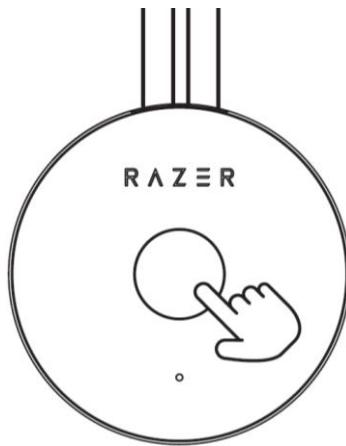

CHANGING THE LIGHTING EFFECT

While powered on, press and hold the multi-function button to cycle through the following colors: white, red, orange, yellow, green, blue, indigo, and purple, and release to set the current color as the active color.

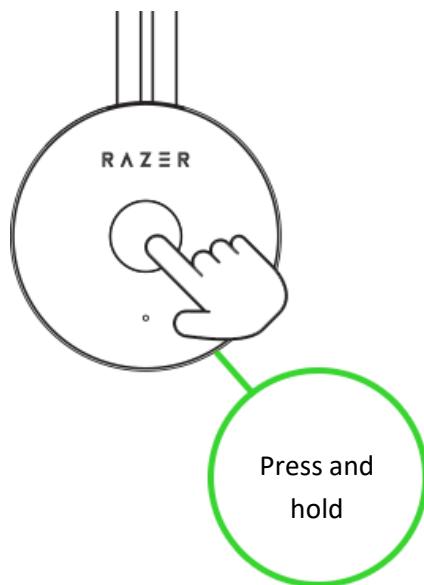


i *This function is only available when the Razer Gamer Room app controls the light strip.*


RESETTING TO FACTORY SETTINGS

Once connected, a reset is required to connect the light strip to a new device.

1. Switch off the power supply of the light strip.

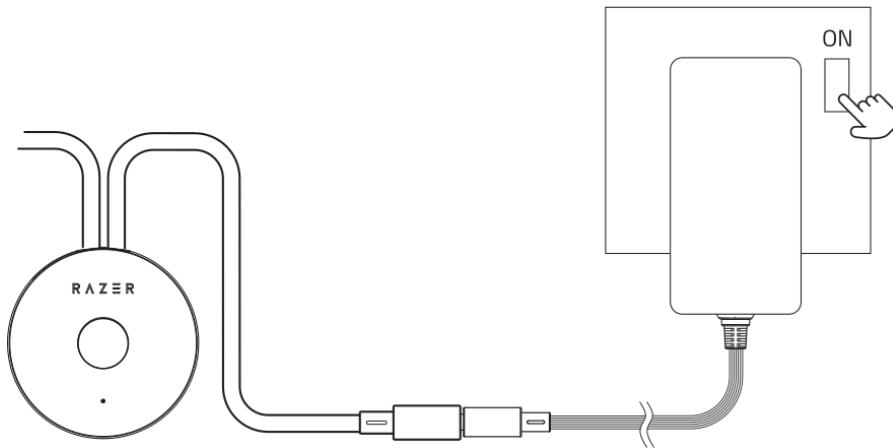

2. While holding the multi-function button, switch on the power supply and continue holding for four (4) more seconds.

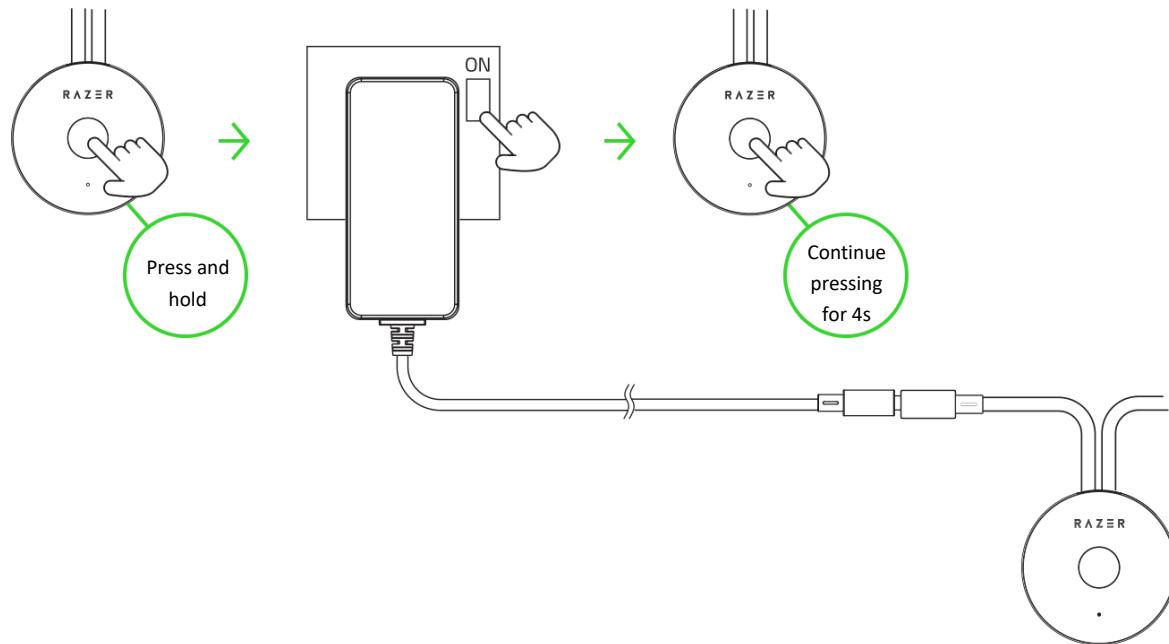

The light strip will briefly cycle through red, green, and blue before displaying white upon a successful reset. The status indicator will also blink in blue to show that the light strip is in pairing mode.

3. Use the Razer Gamer Room app to connect the Razer Aether Light Strip to a new mobile device.

8. CONFIGURING YOUR RAZER AETHER LIGHT STRIP VIA RAZER SYNAPSE


i *Internet connection is required for installation, updates, and cloud-based features. Registering for a Razer ID account is recommended but optional. All listed features are subject to change based on the current software version, the connected device(s), and supported apps and software.*

SYNAPSE TAB

The Synapse tab is your default tab when you first launch Razer Synapse. This tab allows you to navigate the Dashboard subtab.


Dashboard

The Dashboard subtab is an overview of your Razer Synapse, where you can access all your Razer devices, hardware recommendations, modules, and online services.

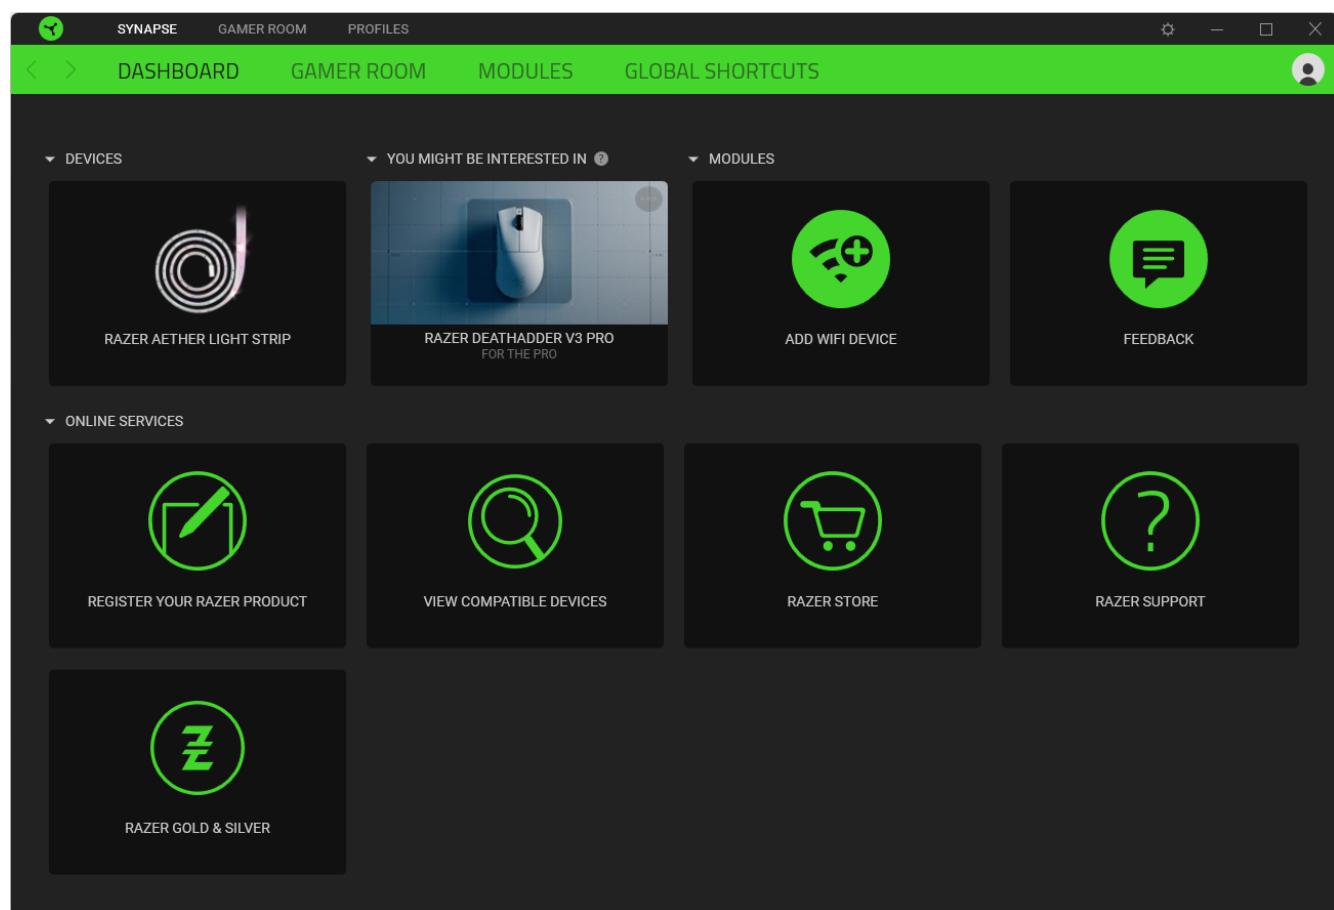


Gamer Room

Use the Gamer Room subtab to manage which devices are directly controlled by Razer Synapse and the Razer Gamer Room app. You can power on or off any Razer Gamer Room device using the Power on/off button () or switch app control by clicking on any device and toggling Synapse Override.

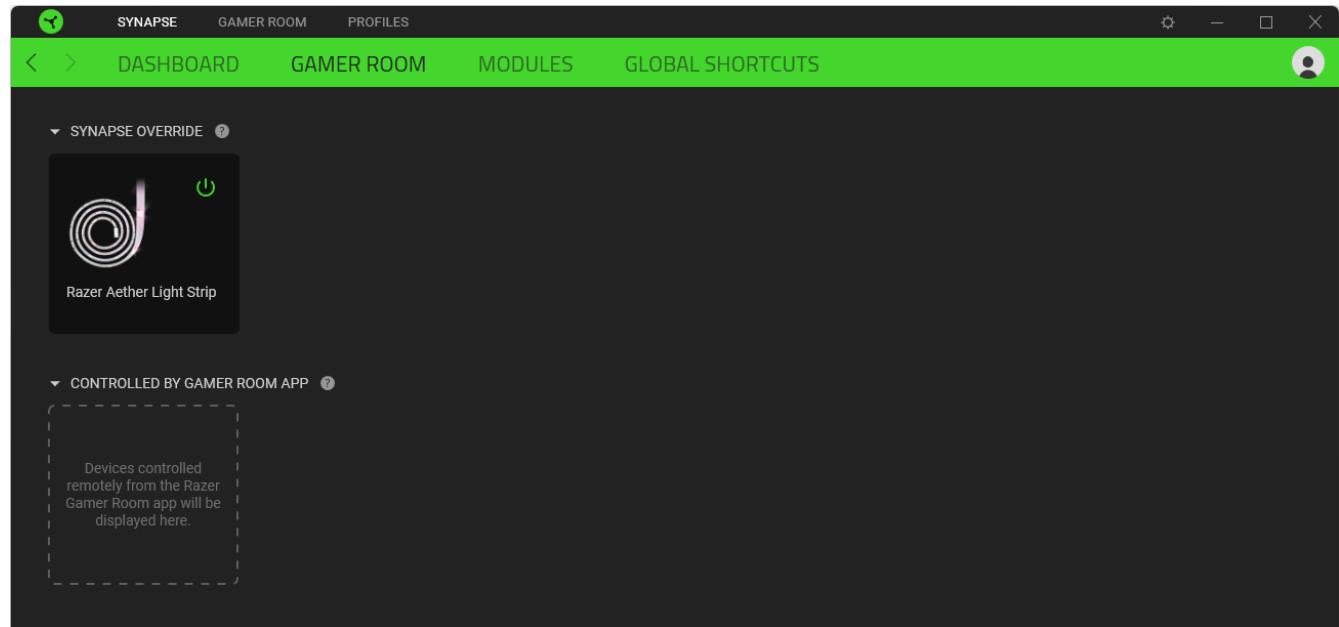

Modules

The Modules subtab displays all installed and available modules for installation.

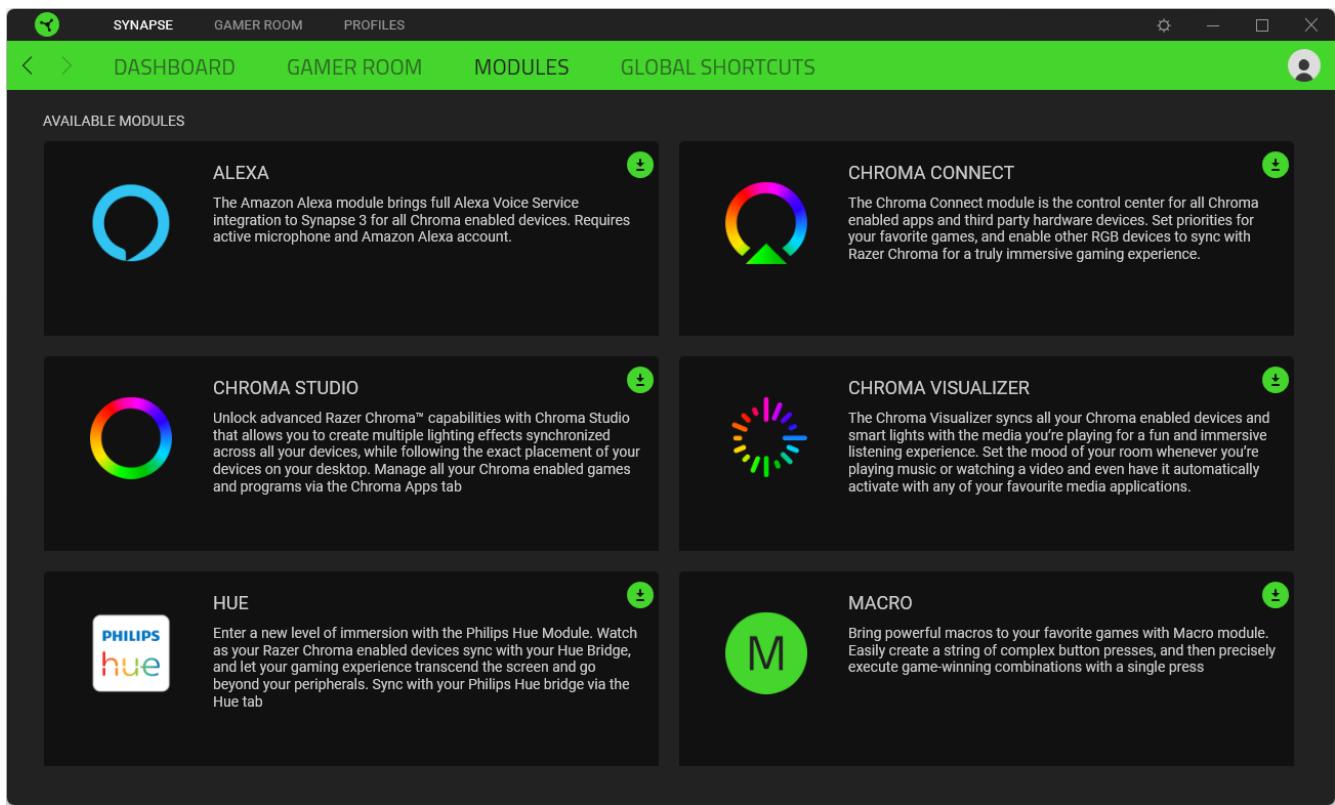

SYNAPSE GAMER ROOM PROFILES

DASHBOARD GAMER ROOM MODULES GLOBAL SHORTCUTS

AVAILABLE MODULES

ALEXA
The Amazon Alexa module brings full Alexa Voice Service integration to Synapse 3 for all Chroma enabled devices. Requires active microphone and Amazon Alexa account.

CHROMA CONNECT
The Chroma Connect module is the control center for all Chroma enabled apps and third party hardware devices. Set priorities for your favorite games, and enable other RGB devices to sync with Razer Chroma for a truly immersive gaming experience.

CHROMA STUDIO
Unlock advanced Razer Chroma™ capabilities with Chroma Studio that allows you to create multiple lighting effects synchronized across all your devices, while following the exact placement of your devices on your desktop. Manage all your Chroma enabled games and programs via the Chroma Apps tab

CHROMA VISUALIZER
The Chroma Visualizer syncs all your Chroma enabled devices and smart lights with the media you're playing for a fun and immersive listening experience. Set the mood of your room whenever you're playing music or watching a video and even have it automatically activate with any of your favorite media applications.


HUE
Enter a new level of immersion with the Philips Hue Module. Watch as your Razer Chroma enabled devices sync with your Hue Bridge, and let your gaming experience transcend the screen and go beyond your peripherals. Sync with your Philips Hue bridge via the Hue tab

MACRO
Bring powerful macros to your favorite games with Macro module. Easily create a string of complex button presses, and then precisely execute game-winning combinations with a single press

Global Shortcuts

Bind operations or Razer Synapse functions to custom key combinations from Razer Synapse-enabled device inputs that apply across all device profiles. [Learn more about Profiles](#)

! Only Razer Synapse-enabled device inputs will be recognized.

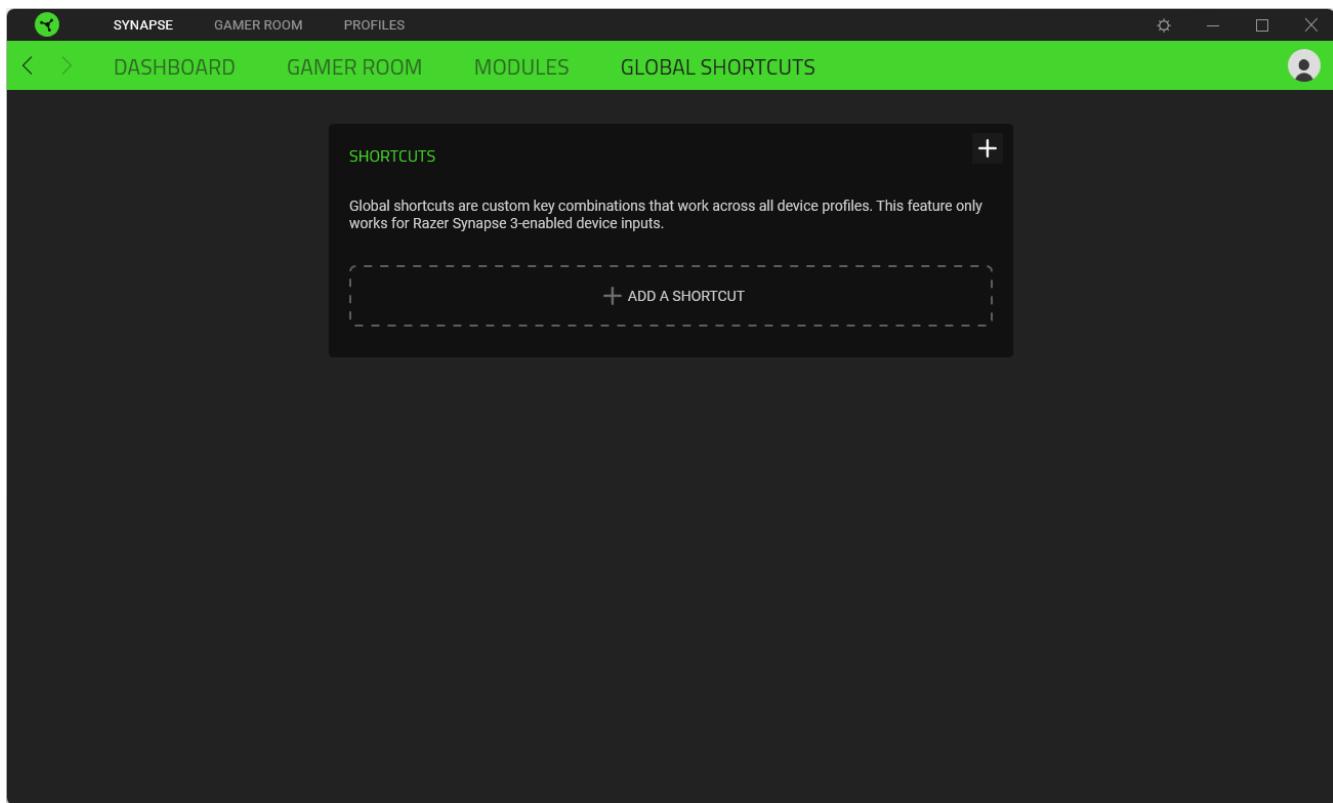


GAMER ROOM TAB

The Gamer Room tab is the main tab for your Razer Aether Light Strip. From here, you can customize your device's settings to unleash its full potential. Changes made under this tab are automatically saved to your system and cloud storage.

Customize

Use the Customize subtab to modify the layout of the light strip and identify the number of LEDs assigned to each bend.

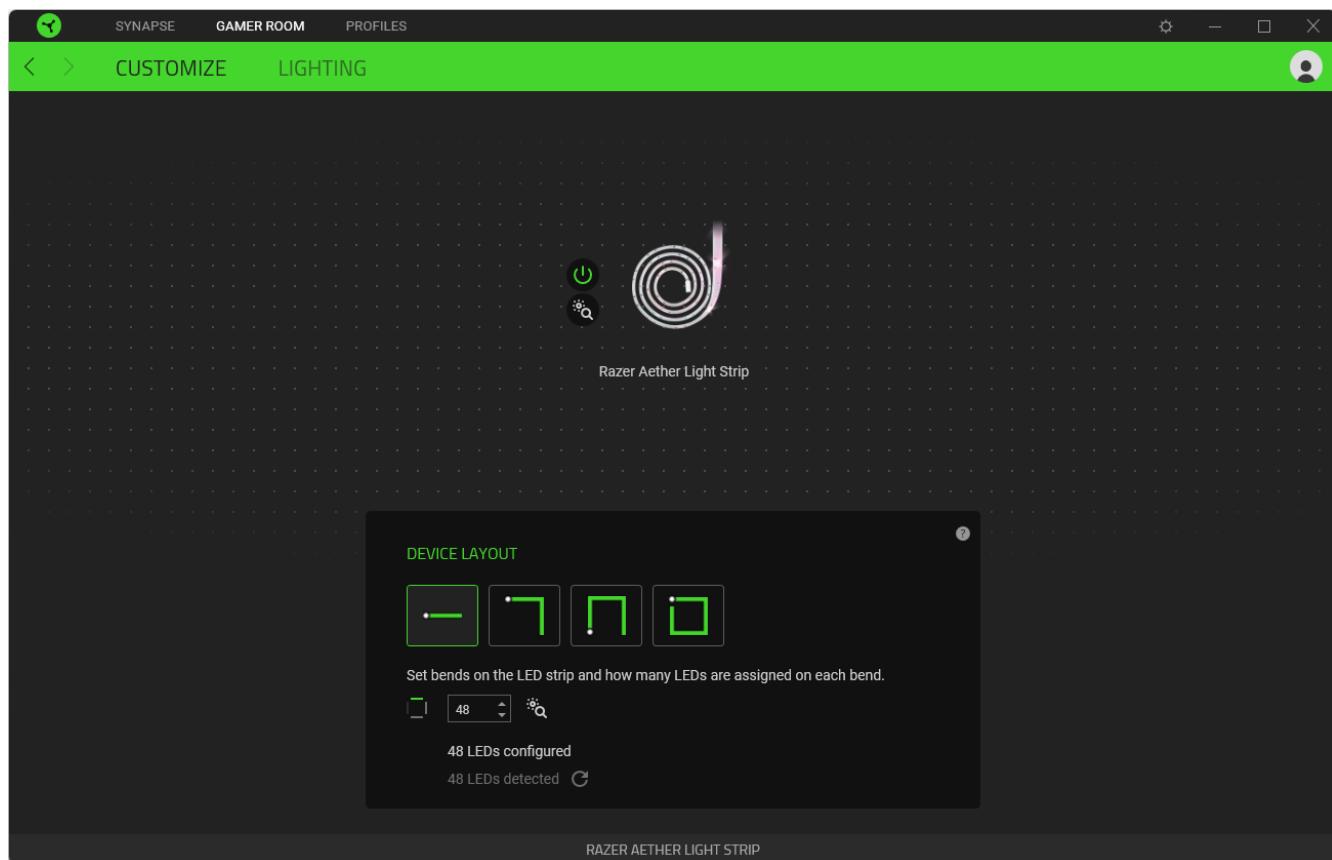

Power on/off a device

You can turn your Razer device on or off by clicking the Power on/off button ().

Identifying a device or LED strip bend

Click the Identify button () of your Razer device or LED strip bend to show where it is in your physical setup.

Renameing a device

Assign your preferred name to your Razer device by clicking on the device name with the Rename cursor ().

Removing a device

Remove a Razer device from your setup by hovering the cursor on its image and clicking the Remove button ().

 *Once removed, you must add the device again on Razer Synapse.*

Device layout


Determine the current layout of the light strip in your physical setup and the number of LEDs on each bend (if applicable) to customize the light strip's lighting effect in detail using the Chroma Studio module.

Refresh connection

Click the Refresh button () to manually trigger the detection of newly connected light strip extender(s).

Lighting

The Lighting subtab allows you to manage how Razer Synapse will take control of your device's lighting, adjust the light strip's brightness and customize its lighting effect.

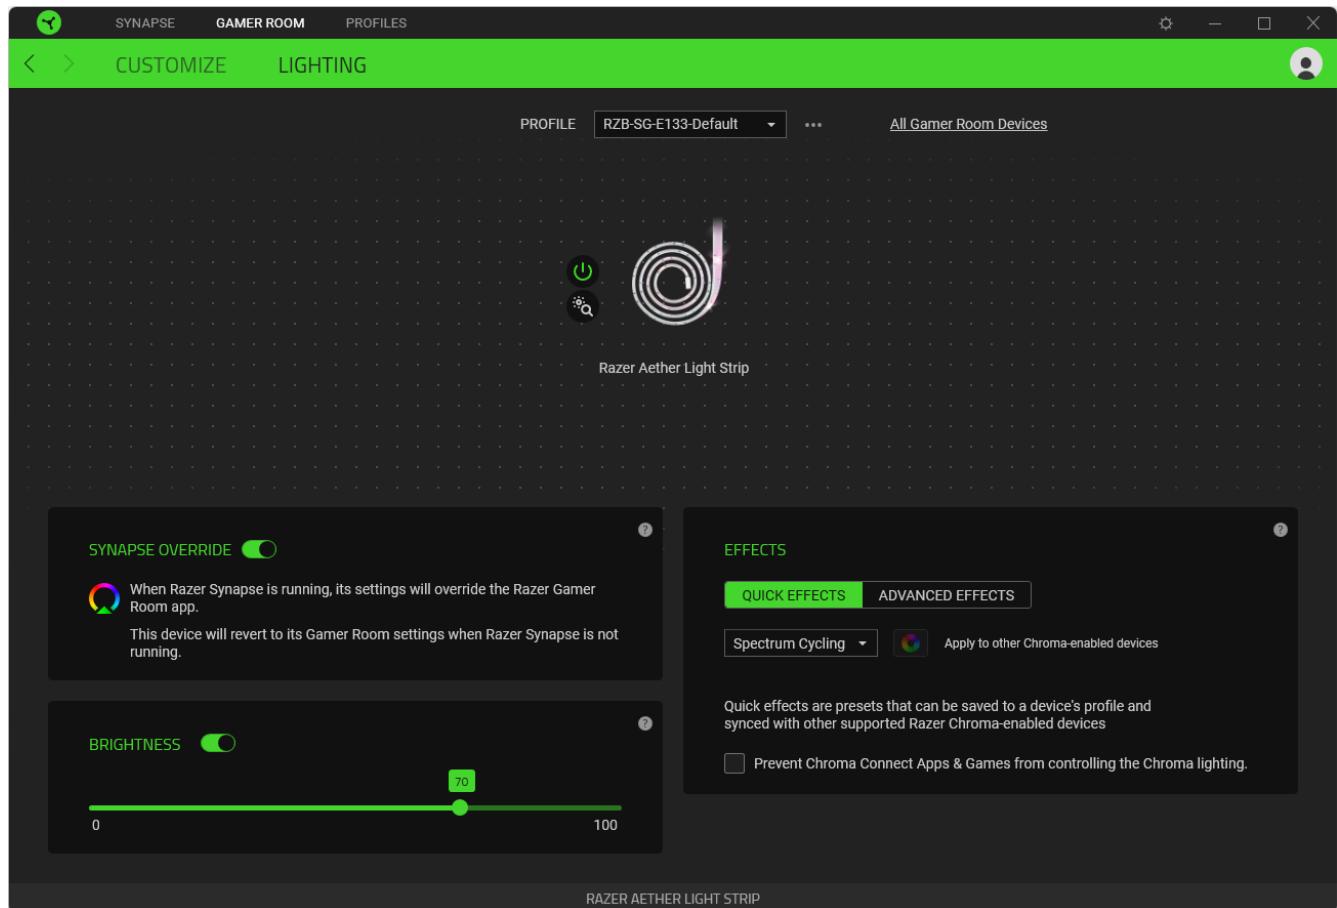

Profile

A Profile is a data storage for keeping all your Razer peripheral's settings. By default, the profile name is based on your system's name. To add, import, rename, duplicate, export, reset or delete a profile, press the Miscellaneous button ($\bullet\bullet\bullet$).

All Gamer Room Devices

Redirects you to the Synapse > Gamer Room subtab, where you can manage which devices are directly controlled by Razer Synapse and the Razer Gamer Room app.

Synapse Override

Enable this setting to automatically take over and override Razer Gamer Room app settings whenever Razer Synapse is running.

Brightness

Adjust the luminance of your Razer device using the brightness slider, or turn it off entirely by toggling the brightness option.

Quick Effects

Several effects can be selected and applied to the light strip, as listed here:

	Name	Description	How to set up
	Ambient awareness	The light strip will reflect the averaged color on the selected screen region	Select or customize a screen region
	Audio meter	The light strip will light up according to the audio level with a default spectrum of colors	Select a Color Boost level
	Breathing	The lighting will fade in and out of the selected color(s)	Select up to 2 colors or randomize colors
	Fire	The LEDs will light up in warm colors to mimic the motion of flames	No further customization required
	Spectrum cycling	The lighting will cycle between 16.8 million colors indefinitely	No further customization required
	Starlight	Each LED will have a chance of fading in and out at a random time and duration	Select up to 2 colors or randomize colors and select a duration
	Static	The light strip will remain lit in the selected color	Select a color
	Wave	The lighting will scroll in the direction selected	Select a wave direction

If you have other supported Razer Chroma-enabled devices, you can synchronize their quick effects with your Razer device by clicking the Chroma Sync button (). You can also exclude this device from Chroma Connect Apps & Games by enabling the option provided.

 *Only devices that support the selected lighting effect will synchronize.*

Advanced Effects


The Advanced Effects option allows you to choose a Chroma Effect you want to use on your Razer Chroma-enabled device. To start making your own Chroma Effect, press the Chroma Studio button ().

PROFILES TAB

The Profiles tab is a convenient way to manage all your profiles and link them to your games and applications.

Devices


View which games are linked to each device's profiles or which Chroma Effect is linked to specific games using the Devices subtab.

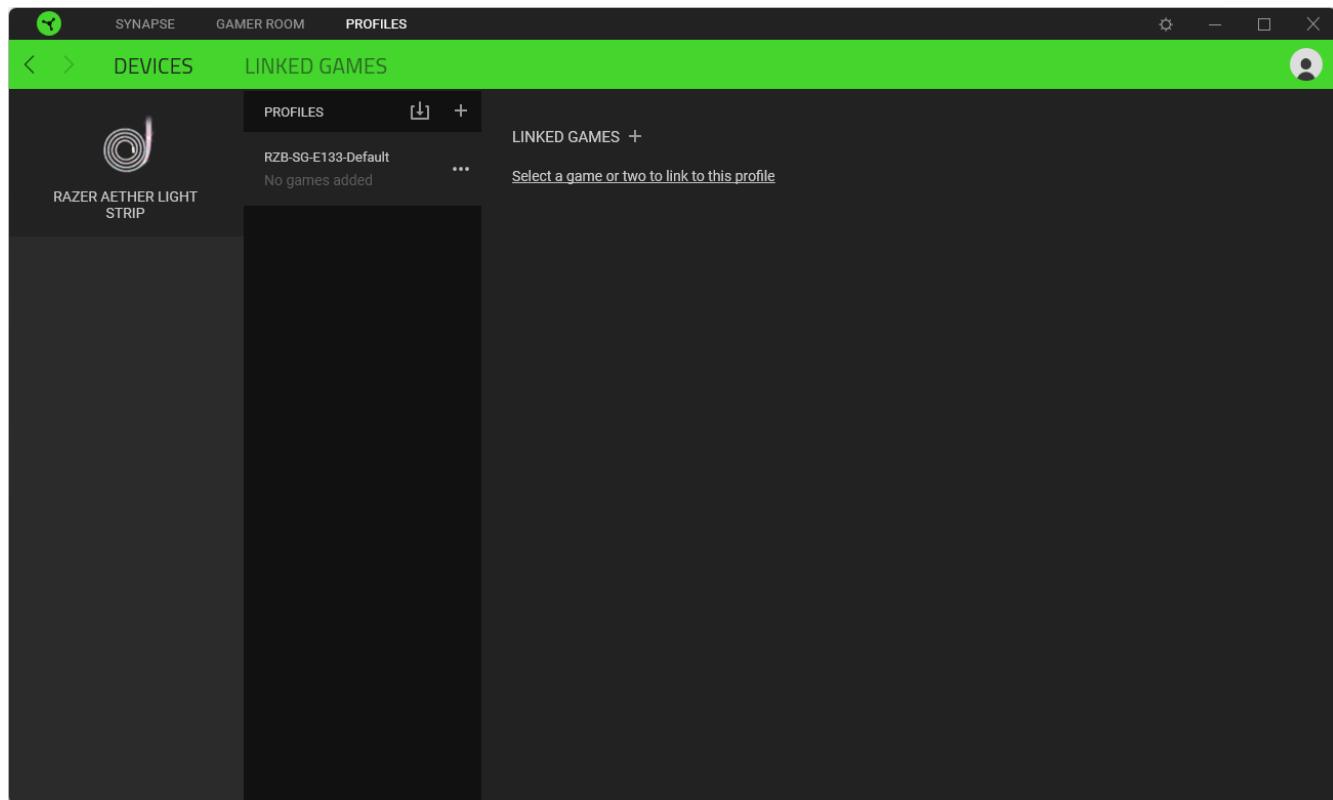

You can import Profiles from your computer or the cloud through the import button () or create new profiles within the selected device using the add button (). To rename, duplicate, export, or delete a profile, simply press the Miscellaneous button (). Each profile can be set to activate when you run an application using the Linked Games option.

Linked Games


The Linked Games subtab allows you to add games, view devices linked to games, or search for added games. You can also sort games based on alphabetical order, last played, or most played. Added games will still be listed here, even if not linked to a Razer device.

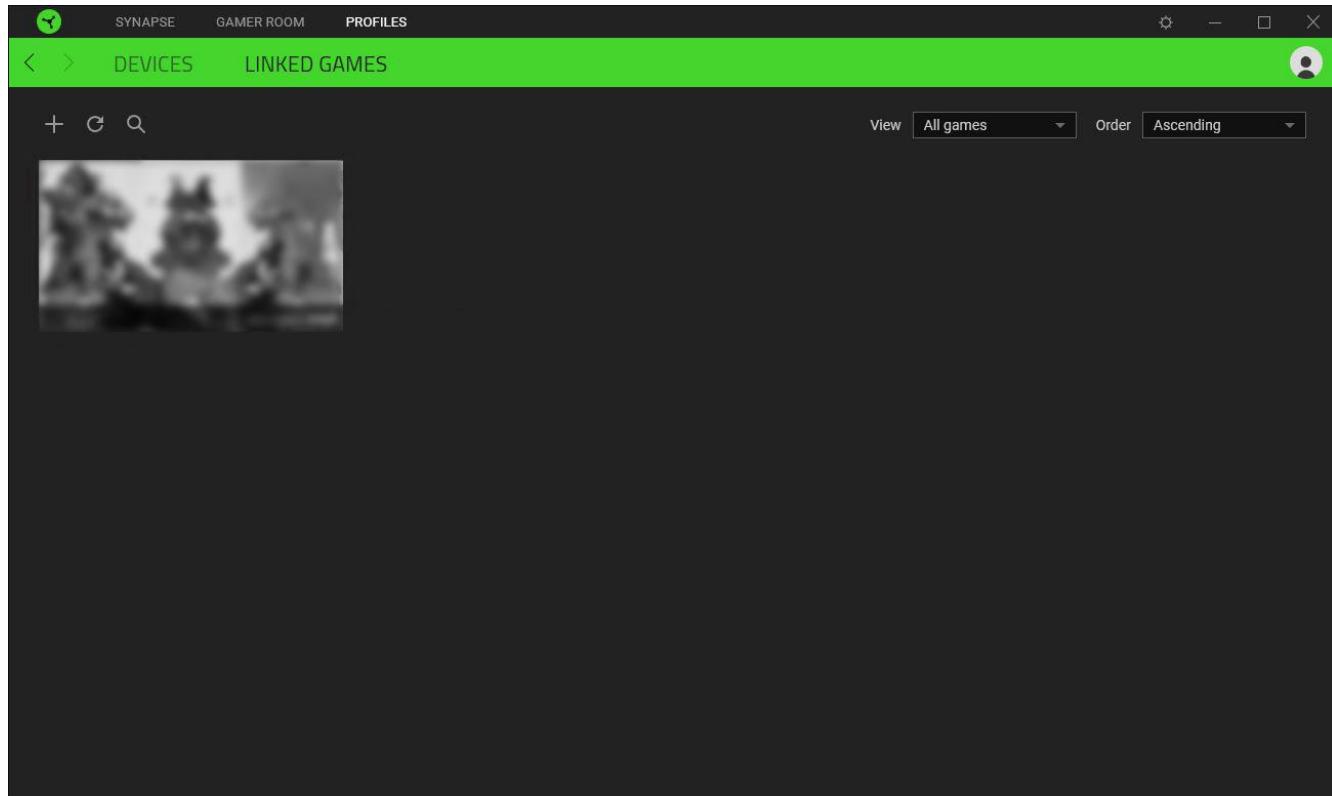

To link games to connected Razer devices or Chroma Effects, simply click on any game from the list, and then click **Select a device and its profile to launch automatically during gameplay** to select the Razer device or Chroma Effect it will link with. Once connected, you may click the Miscellaneous button (•••) of the corresponding Chroma Effect or device to select a specific Chroma Effect or profile.

SETTINGS WINDOW

The Settings window, accessible by clicking the () button on Razer Synapse, enables you to configure the startup behavior and display language of Razer Synapse, control the recommendations you see on the Dashboard, check the firmware version and master guide of each Razer device, or perform a factory reset on any connected Razer device.

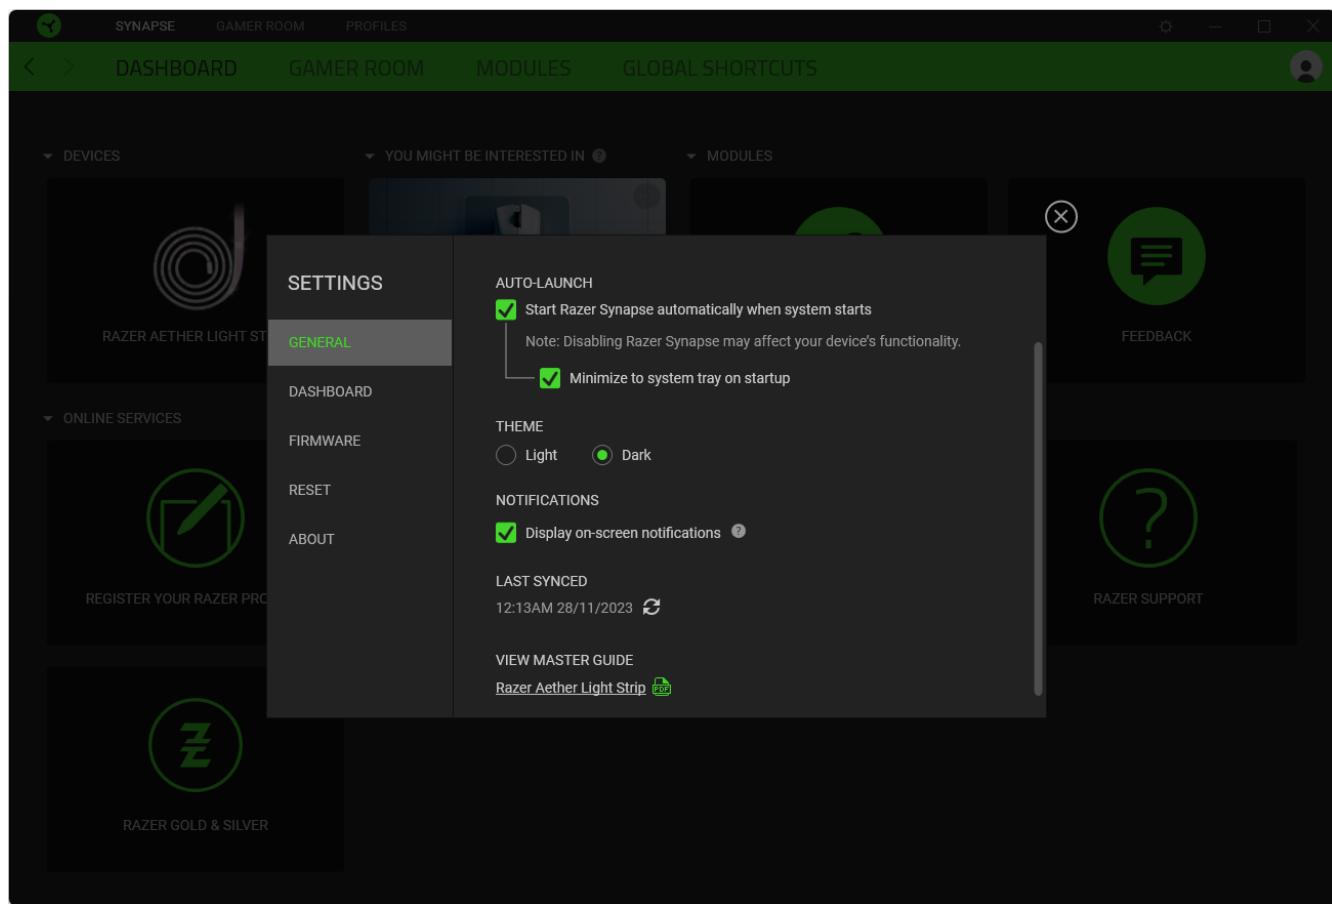

General tab

The General tab lets you change the software's display language, startup behavior, theme, and onscreen notifications. You may also manually sync your profiles to the cloud () or view the master guide of all connected Razer devices and installed modules.

Dashboard tab

Use the Dashboard tab to customize which Razer device recommendations based on your setup, and the games you play will appear on the Dashboard.

Firmware tab

Access the Firmware tab to view the current firmware version of your Razer device(s), and/or visit the Software and Firmware Update page to see whether a firmware update is available for your device(s).

Reset tab

The Reset tab allows you to perform a factory reset on all connected Razer devices with on-board memory and/or reset Razer Synapse tutorials to acquaint yourself again with Razer Synapse's new features on its next launch.

 *All profiles stored on the selected device's on-board memory will be erased when you reset a Razer device.*

About tab

The About tab displays brief software information and copyright statement, and provides relevant links for its terms of use. You may also use this tab to check for software updates, or as quick access to Razer's social communities.

9. SAFETY AND MAINTENANCE

SAFETY GUIDELINES

To achieve maximum safety while using the Razer Aether Light Strip, we suggest that you adopt the following guidelines:

- Should you have trouble operating the device properly and troubleshooting does not work, unplug the device and contact the Razer hotline or go to support.razer.com for support. Don't attempt to service or fix the device yourself at any time.
- Don't take apart the device and attempt to operate it under abnormal current loads. Doing so may void your warranty.
- Only use accessories provided with the device and purchase accessories made and/or approved by Razer.
- Only use the device indoors.
- Power off the device before relocating, modifying, and/or connecting/disconnecting any component.
- Always handle all included accessories with care. When plugging or unplugging any accessory, always pull from its plug/connector.
- The mounting method provided with the device has not been evaluated for reliability. Mounting the device in areas other than those specified in this guide may cause injury and damage to property. Please consider using supplemental means of securing the device on your setup when in doubt.
- A maximum of 8 light strip extenders can be connected to the Razer Aether Light Strip.
- Keep the device and its components away from liquid, humidity, or moisture. Operate the device only within the specific temperature range of 0°C (32°F) to 40°C (104°F). Should the temperature exceed this range, unplug and turn off the device to stabilize the temperature to an optimal level.

MAINTENANCE AND USE

The Razer Aether Light Strip requires minimum maintenance to keep it in optimum condition. Once a month, we recommend you clean it using a soft cloth to prevent dirt buildup. Do not use soap or harsh cleaning agents.

10. LEGALESE

COPYRIGHT AND INTELLECTUAL PROPERTY INFORMATION

©2024 Razer Inc. All rights reserved. Razer, the triple-headed snake logo, Razer logo, "For Gamers. By Gamers." and "Razer Chroma" are trademarks or registered trademarks of Razer Inc. and/or affiliated companies in the United States and other countries. Actual product may differ from pictures. All other trademarks are the property of their respective owners. Warranty not valid outside of product's intended region.

Android, Google, Google Logo, Google Play, and the Google Play logo are registered trademarks of Google LLC.

Apple, the Apple logo, and iPhone are trademarks of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc. iOS is a trademark or registered trademark of Cisco in the U.S. and other countries and is used under license.

Matter™ is developed by the Connectivity Standards Alliance™. This brand, related logos, and marks are trademarks of the Alliance, all rights reserved.

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc., and any use of such marks by Razer is under license.

Windows and the Windows logo are trademarks of the Microsoft group of companies.

Razer Inc. ("Razer") may have copyright, trademarks, trade secrets, patents, patent applications, or other intellectual property rights (whether registered or unregistered) concerning the product in this guide. Furnishing of this guide does not give you a license to any such copyright, trademark, patent or other intellectual property right. The Razer Aether Light Strip (the "Product") may differ from pictures whether on packaging or otherwise. Razer assumes no responsibility for such differences or for any errors that may appear. Information contained herein is subject to change without notice.

LIMITED PRODUCT WARRANTY

For the latest and current terms of the Limited Product Warranty, please visit razer.com/warranty.

LIMITATION OF LIABILITY

Razer shall in no event be liable for any lost profits, loss of information or data, special, incidental, indirect, punitive or consequential or incidental damages, arising in any way out of distribution of,

sale of, resale of, use of, or inability to use the Product. In no event shall Razer's liability exceed the retail purchase price of the Product.

GENERAL

These terms shall be governed by and construed under the laws of the jurisdiction in which the Product was purchased. If any term herein is held to be invalid or unenforceable, then such term (in so far as it is invalid or unenforceable) shall be given no effect and deemed to be excluded without invalidating any of the remaining terms. Razer reserves the right to amend any term at any time without notice.