



RAZER MOUSE DOCK PRO

MASTER GUIDE


Power up your gaming with the **Razer Mouse Dock Pro**—a wireless dock and puck combo designed for seamless wireless charging. Armed with an integrated 4K Hz transceiver, unlock ultra-responsive performance for our most advanced mice, as you bask in the glow of victory with Razer Chroma™ RGB.

CONTENTS

1. WHAT'S INSIDE	3
2. WHAT'S NEEDED	4
3. LET'S GET YOU COVERED.....	4
4. TECHNICAL SPECIFICATIONS	5
5. SETTING UP YOUR RAZER MOUSE DOCK PRO	6
6. CONFIGURING YOUR RAZER MOUSE DOCK PRO VIA RAZER SYNAPSE	8
7. SAFETY AND MAINTENANCE	17
8. LEGALESE	19

1. WHAT'S INSIDE

- Razer Mouse Dock Pro

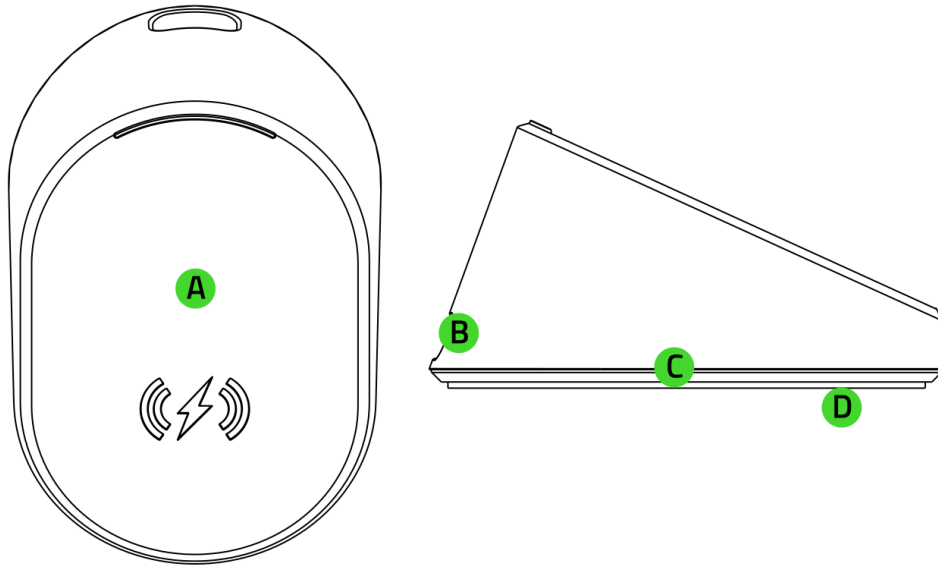

A. Magnetic wireless charging surface*

B. USB Type C port


C. Underglow lighting Powered by Razer Chroma™ RGB

D. Anti-slip base

- Razer Wireless Charging Puck



- USB Type A to USB Type C Speedflex cable



- Important Product Information Guide

*For an updated list of compatible Razer wireless charging-enabled mice, visit support.razer.com

2. WHAT'S NEEDED

PRODUCT REQUIREMENTS

- USB Type A port
- Compatible Razer wireless charging enabled-mouse*

RAZER SYNAPSE REQUIREMENTS

- Windows® 10 64-bit (or higher)
- Internet connection for software installation


**Sold separately. For an updated list of compatible mice, visit support.razer.com*

3. LET'S GET YOU COVERED



Register your product and score exclusive benefits

razerid.razer.com/warranty

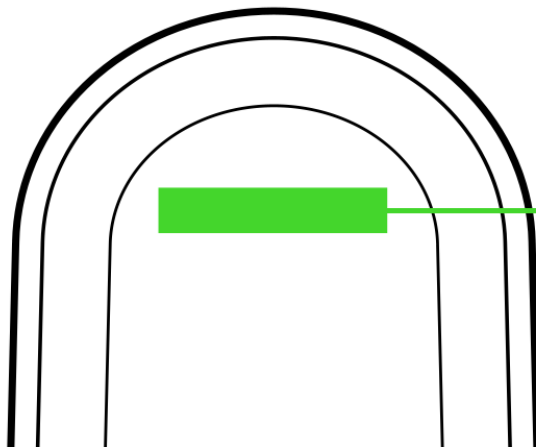

*Your product's
serial number can
be found here.*


4. TECHNICAL SPECIFICATIONS

- Built-in Razer HyperPolling 4K Hz transceiver
- USB Type C port for power and data
- Anti-slip base
- Razer Chroma™ RGB underglow with 16.8 million color options
- High-speed USB Type A to USB Type C cable included
- Wireless charging puck (included)
- Compatible devices: Razer Basilisk V3 Pro*


**For an updated list of compatible Razer wireless charging-enabled mice, visit support.razer.com*

5. SETTING UP YOUR RAZER MOUSE DOCK PRO

1. On your Razer mouse (not included), unlock and remove the cover puck and replace it with the wireless charging puck.

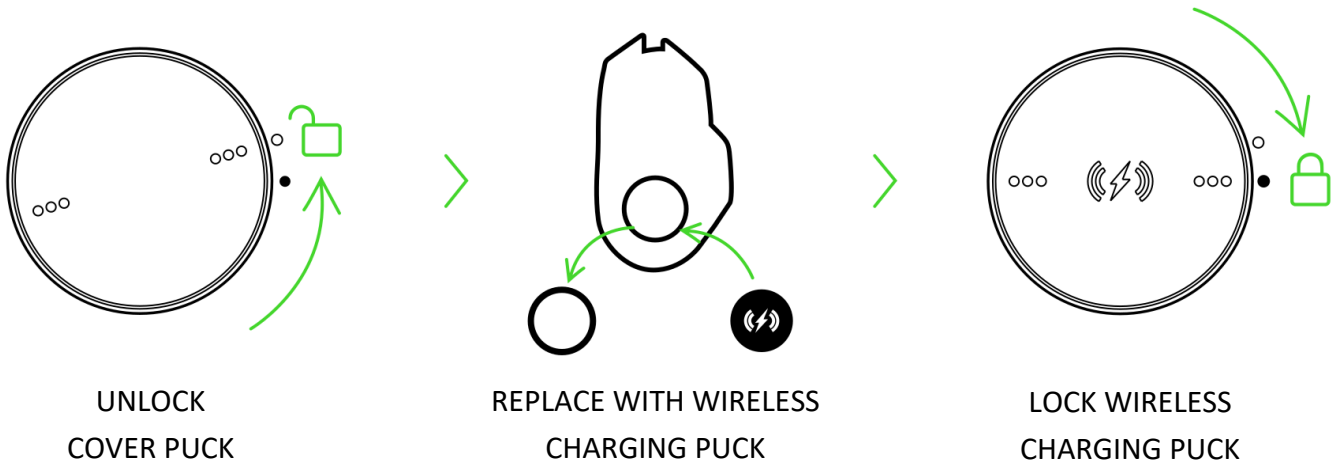


2. Connect the mouse dock to any of your PC's USB ports using the USB Type C to USB Type A cable.

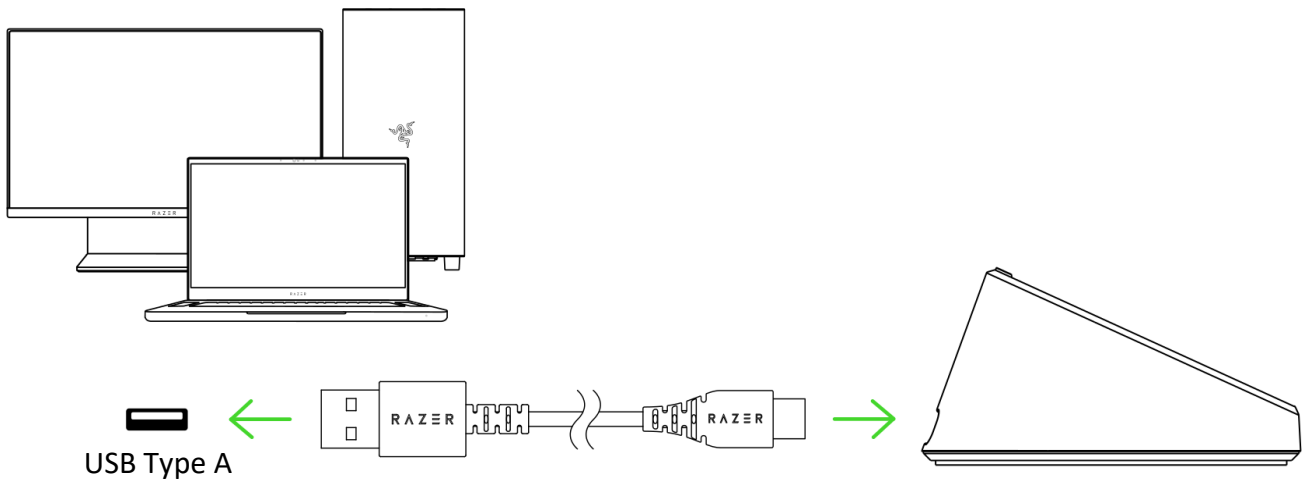

i Install Razer Synapse when prompted or download the installer from razer.com/synapse

3. With the wireless charging puck of your Razer mouse aligned to the mouse dock's wireless charging surface, place your Razer mouse on top of the mouse dock. The mouse dock will begin charging your Razer mouse and show its charging status in its underglow lighting.

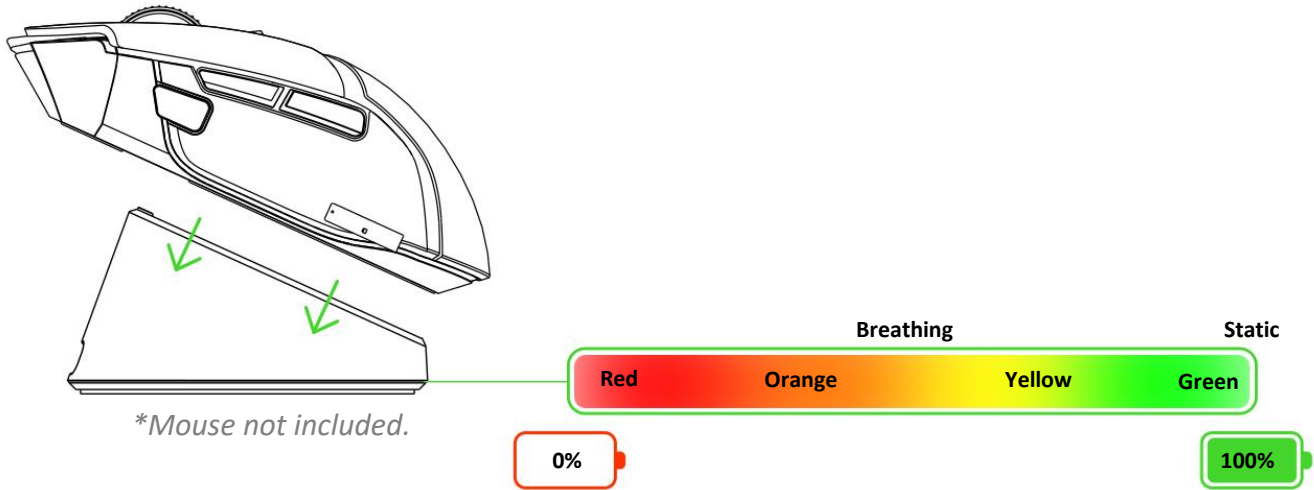

i You can customize the mouse dock's underglow lighting behavior on Razer Synapse.

6. CONFIGURING YOUR RAZER MOUSE DOCK PRO VIA RAZER SYNAPSE


i *Internet connection is required for installation, updates, and cloud-based features. Registering for a Razer ID account is recommended but optional. All listed features are subject to change based on the current software version, the connected device(s), and supported apps and software.*

SYNAPSE TAB

The Synapse tab is your default tab when you first launch Razer Synapse. This tab allows you to navigate the Dashboard subtab.


Dashboard

The Dashboard subtab is an overview of your Razer Synapse, where you can access all your Razer devices, modules, and online services.

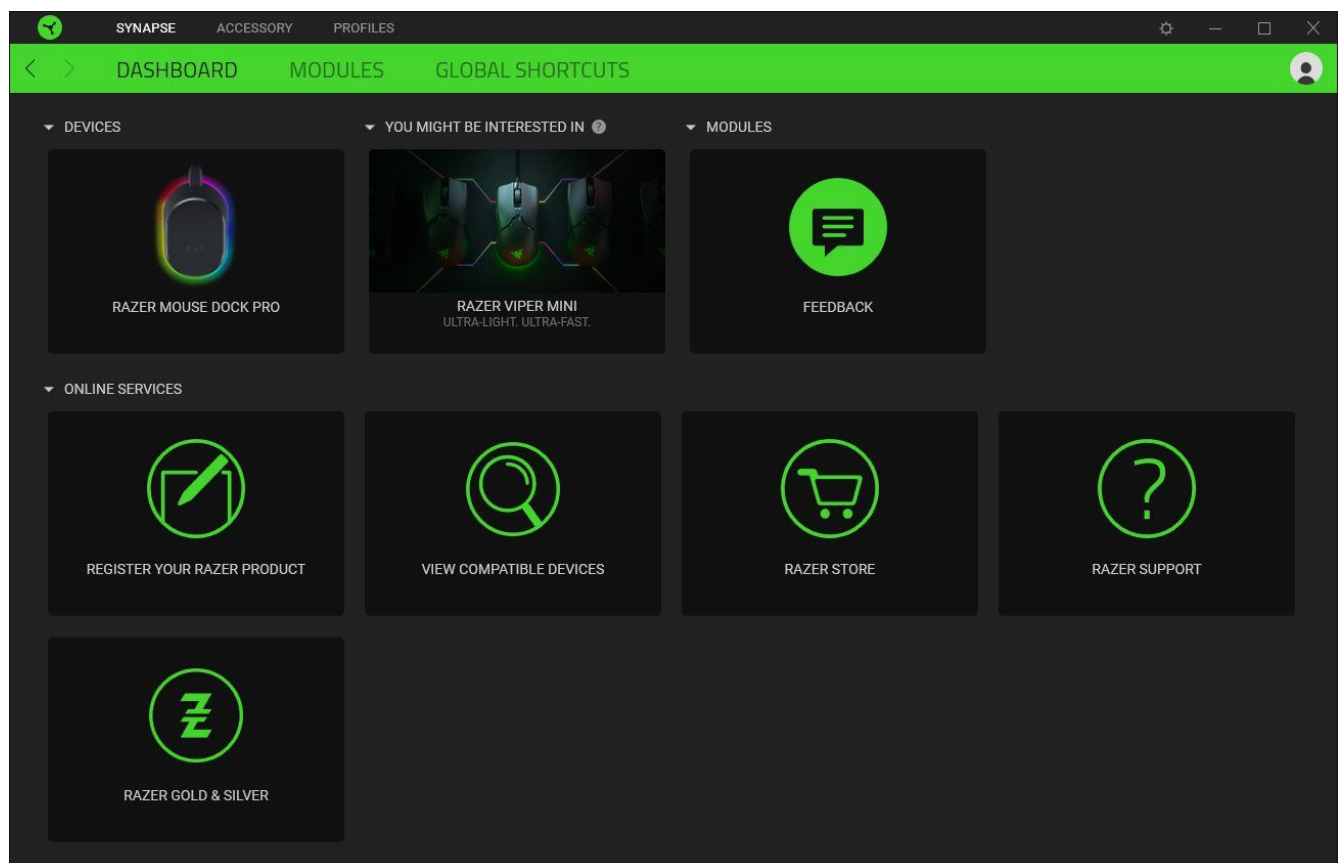

Modules


The Modules subtab displays all installed and available modules for installation.

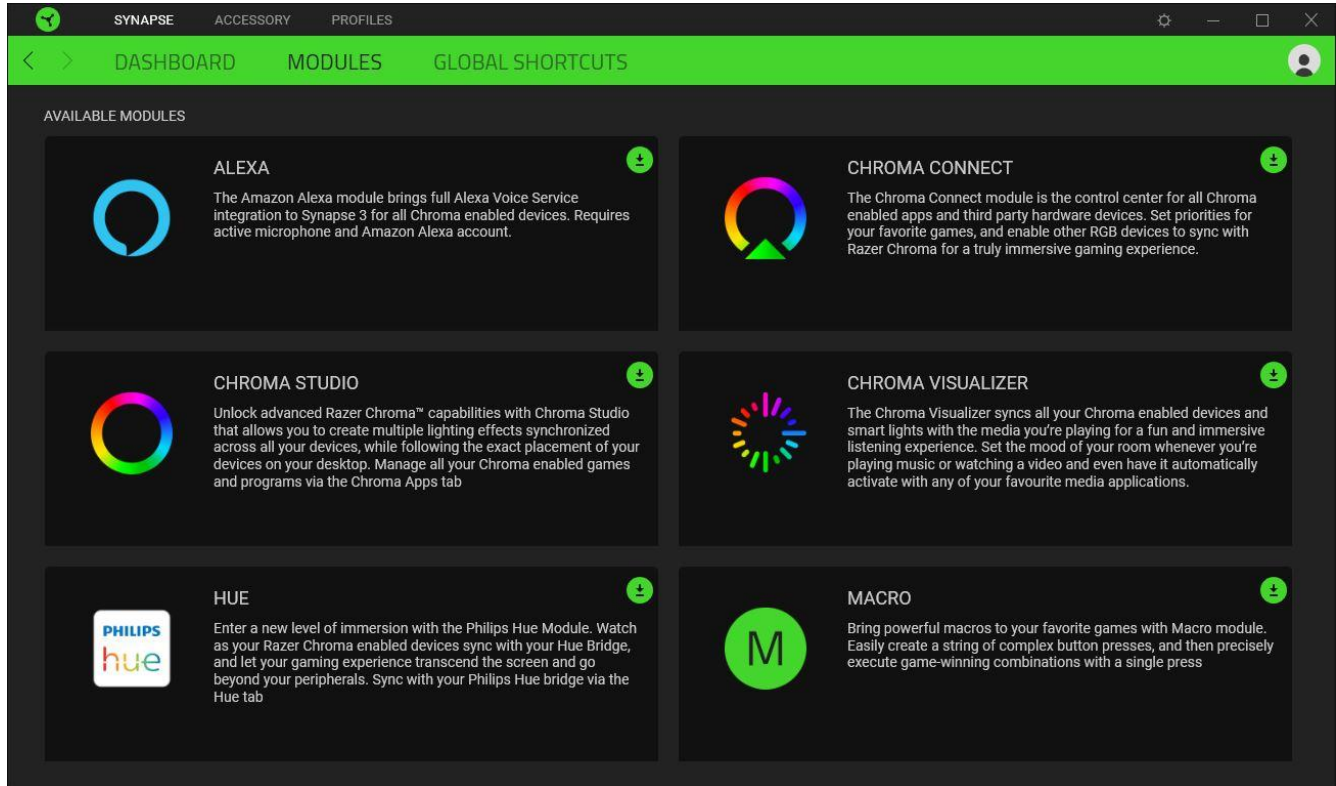

Global Shortcuts

Bind operations or Razer Synapse functions to custom key combinations from any Razer Synapse-enabled device inputs, which apply across all device profiles. [Learn more about Profiles](#)

 *Only Razer Synapse-enabled device inputs will be recognized.*

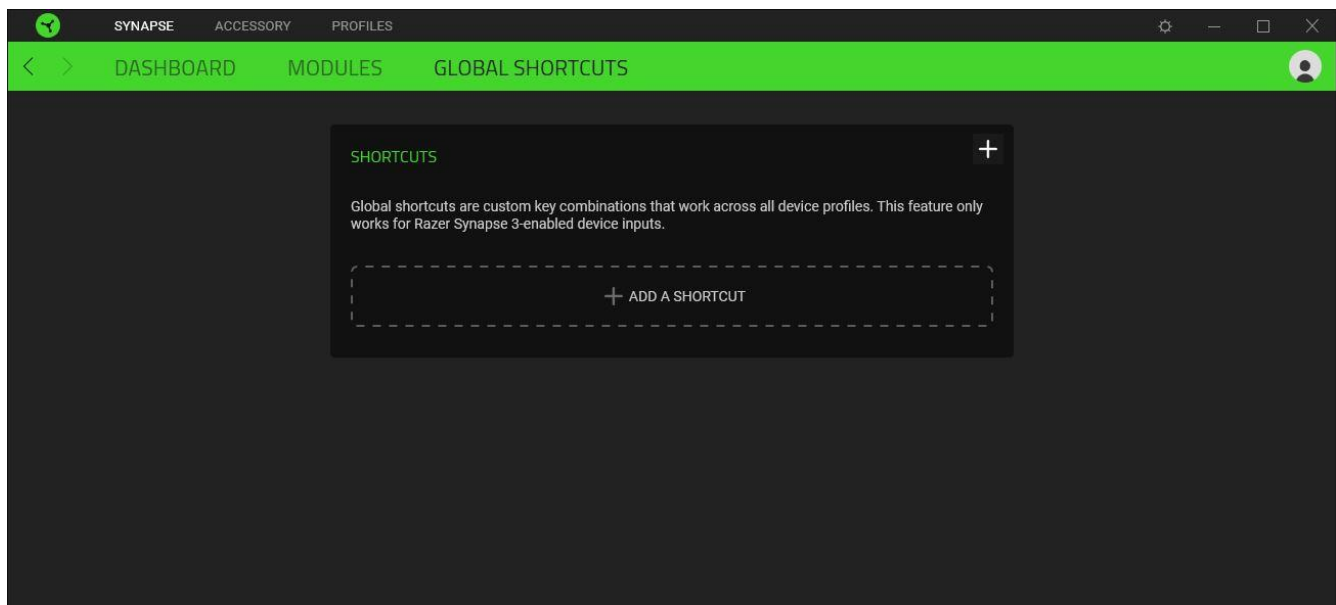


ACCESSORY TAB

The Accessory tab is the main tab for the Razer Mouse Dock Pro. From here, you'd be able to pair the mouse dock with your compatible Razer mouse and customize its underglow lighting.

Pairing


Use the Pairing tab to pair (or unpair) the mouse dock with your compatible Razer mouse. To pair your compatible Razer mouse, launch the Pairing Utility and follow the on-screen instructions.

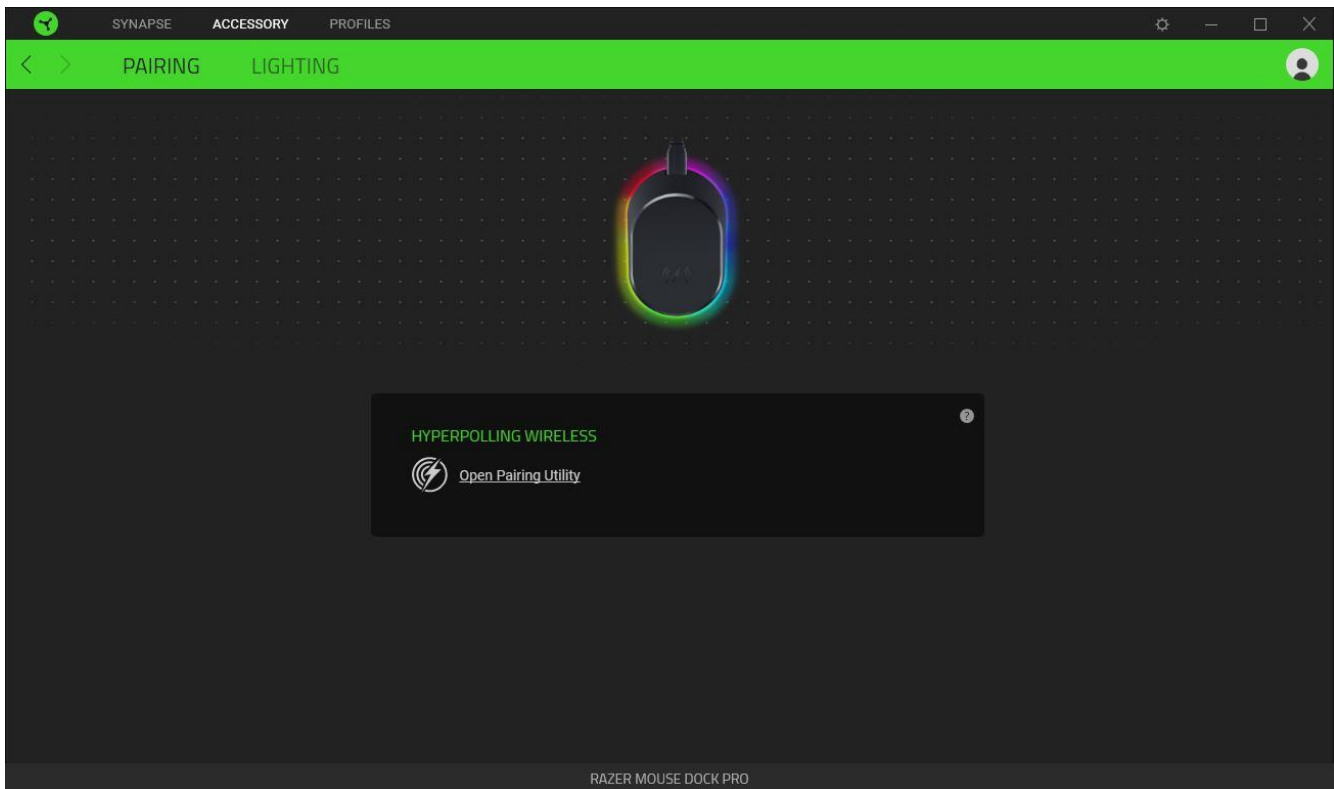

Upon pairing your mouse dock with your Razer mouse, click on **Configure Polling Rate** to access the new polling rate options available in your Razer mouse. Alternatively, you can directly access your Razer mouse's polling rate from its Performance subtab.

Lighting

The Lighting subtab enables you to modify your Razer device's light settings.

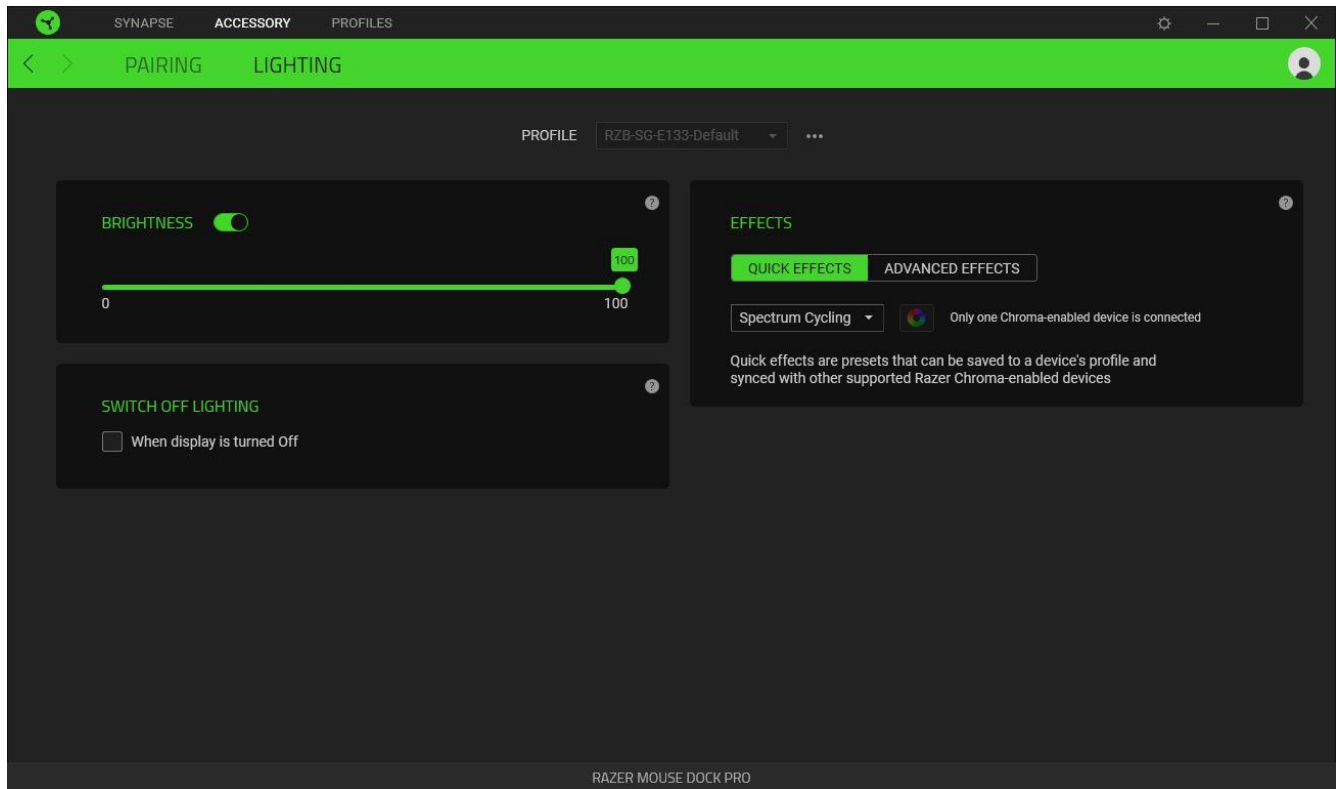

Profile

Profile is a data storage for keeping all your Razer peripheral's settings. By default, the profile name is based on your system's name. To add, rename, duplicate, or delete a profile, simply press the Miscellaneous button (●●●).

Brightness

You can turn off your Razer device's lighting by toggling the Brightness option or increase/decrease the luminance using the slider.


Switch Off Lighting

Enable this power-saving option to disable your device's lighting in response to your system's display turning off.

Quick effects


Several quick effects can be selected and applied to your mouse dock's lighting, as listed here:

	Name	Description	How to set up
	Audio meter	The underglow lighting will light up according to the audio level with a default spectrum of colors	Select a Color Boost level
	Battery level	The underglow lighting will only show the current battery level of your Razer mouse	No further customization required
	Breathing	The LEDs will fade in and out of the selected color(s)	Select up to 2 colors or randomize colors
	Spectrum cycling	The underglow lighting will cycle between 16.8 million colors indefinitely	No further customization required
	Starlight	Each LED will have a chance of fading in and out at a random time and duration	Select up to 2 colors or randomize colors and select a duration
	Static	The underglow lighting will remain lit in the selected color	Select a color
	Wave	The underglow lighting will scroll in the direction selected	Select either clockwise or counter-clockwise wave direction

If you have other supported Razer Chroma-enabled devices, you can synchronize their quick effects with your Razer device by clicking the Chroma Sync button ().

 *Only devices that support the selected lighting effect will synchronize.*

Advanced Effects


The Advanced Effects option allows you to choose a Chroma Effect you want to use on your Razer Chroma-enabled peripheral. To start making your own Chroma Effect, simply press the Chroma Studio button ().




PROFILES TAB

The Profiles tab is a convenient way to manage all your profiles and link them to your games and applications.

Devices

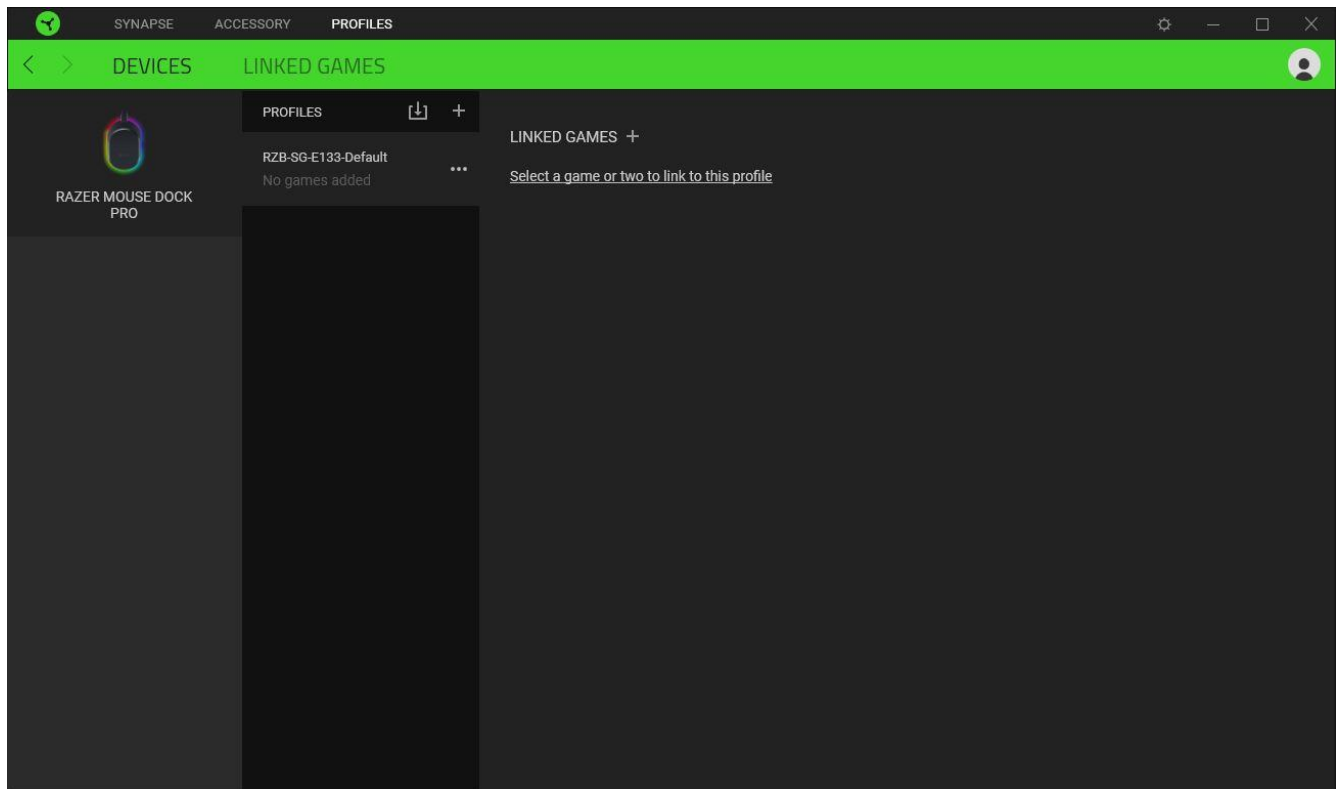
View which games are linked to each device's profiles or which Chroma Effect is linked to specific games using the Devices subtab.



You can import Profiles from your computer or the cloud through the import button () or create new profiles within the selected device using the add button (). To rename, duplicate, export, or delete a profile, simply press the Miscellaneous button (). Each profile can be set to activate when you run an application using the Linked Games option.

Linked Games


The Linked Games subtab allows you to add games, view devices linked to games, or search for added games. You can also sort games based on alphabetical order, last played, or most played. Added games will still be listed here, even if they are not linked to a Razer device.

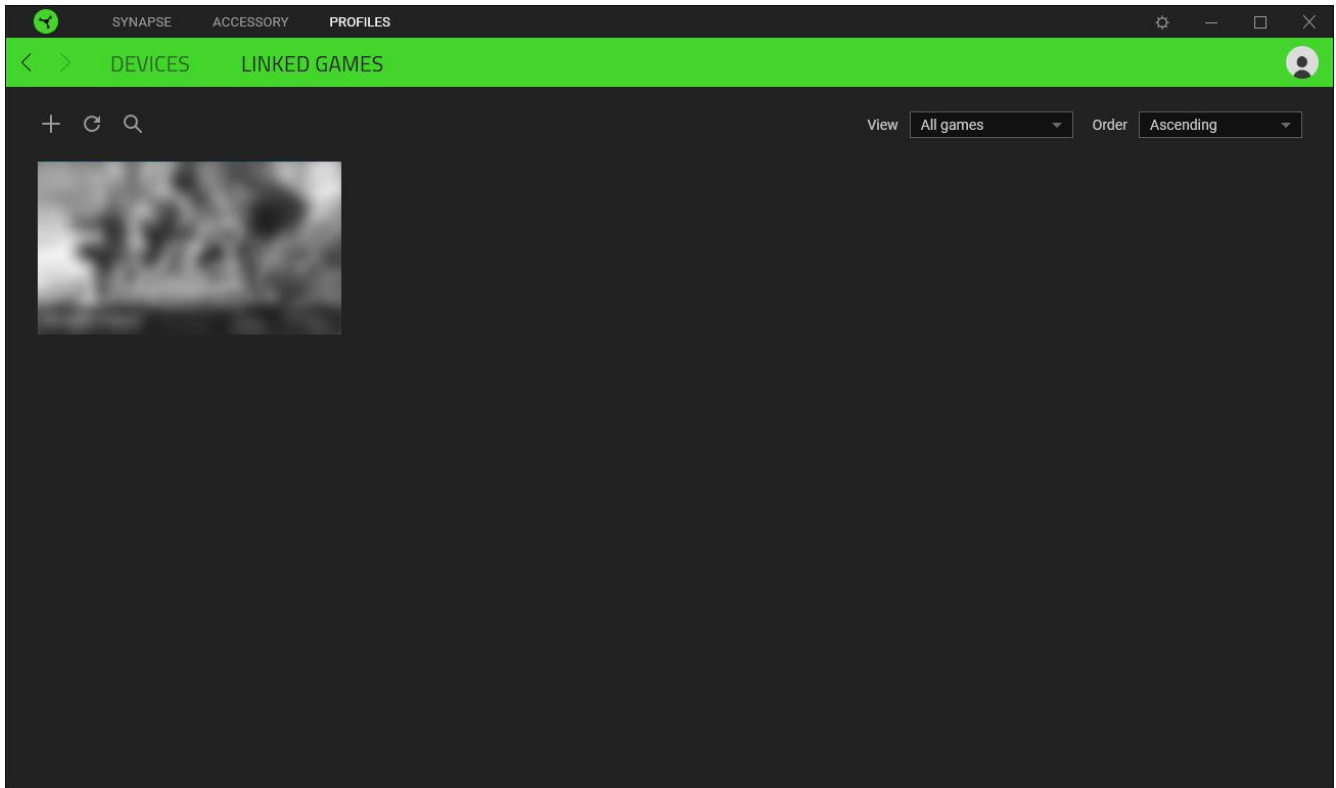

To link games to connected Razer devices or Chroma Effects, simply click on any game from the list, and then click **Select a device and its profile to launch automatically during gameplay** to select the Razer device or Chroma Effect it will link with. Once connected, you may click the Miscellaneous button (●●●) of the corresponding Chroma Effect or device to select a specific Chroma Effect or profile.

SETTINGS WINDOW

The Settings window, accessible by clicking the (⚙) button on Razer Synapse, enables you to configure the startup behavior and display language of Razer Synapse, view the master guides of each connected Razer device, or perform a factory reset on any connected Razer device.

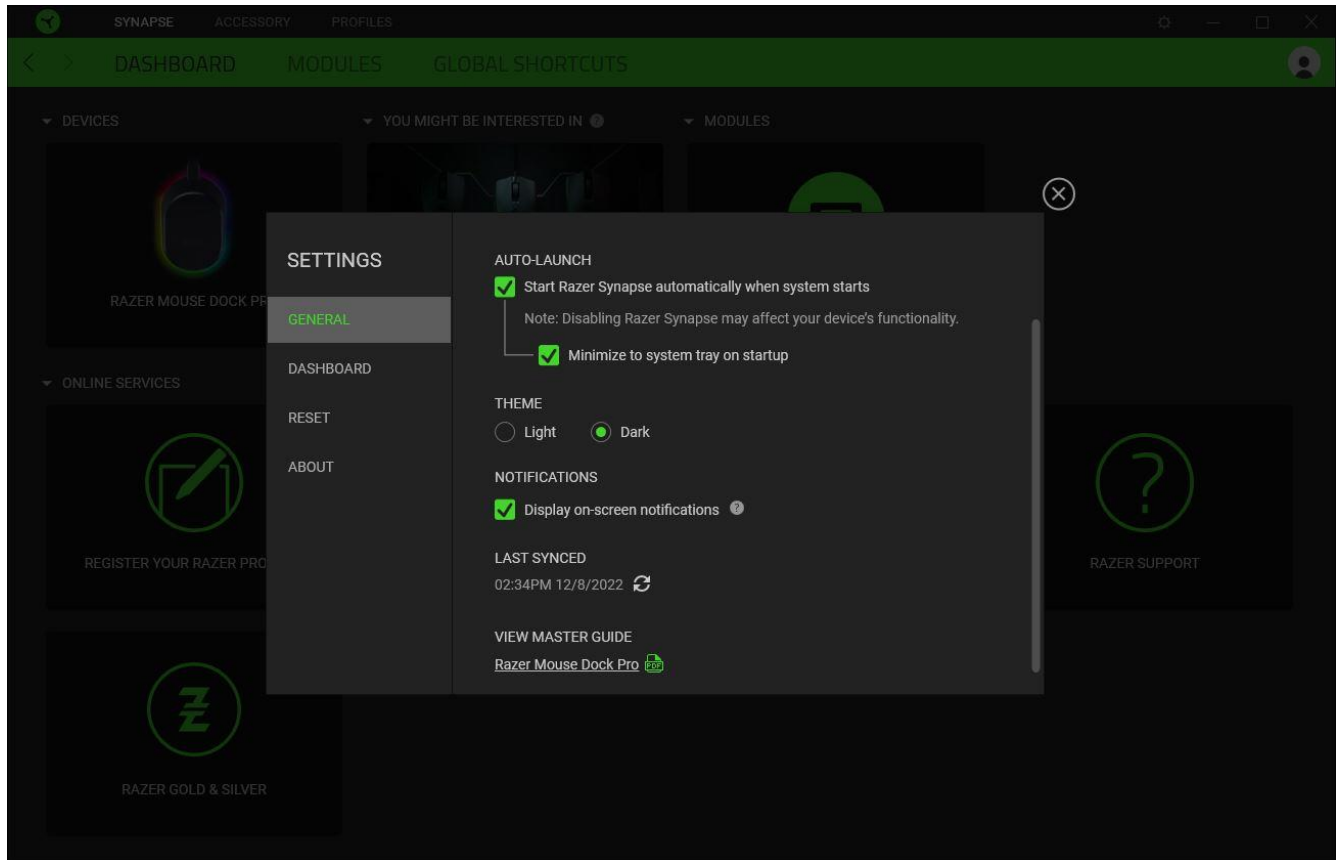

General tab

The General tab lets you change the software's display language, startup behavior, theme, and on-screen notifications display. You may also manually sync your profiles to the cloud (↻) or view the master guide of all connected Razer devices and installed modules.

Dashboard tab

Use the Dashboard tab to customize which Razer device recommendations based on your setup, and the games you play will appear on the Dashboard.

Reset tab

The Reset tab allows you to perform a factory reset on all connected Razer devices with on-board memory and/or reset Razer Synapse tutorials to acquaint yourself again with Razer Synapse's new features on its next launch.



All profiles stored on the selected device's on-board memory will be erased when you reset a Razer device.

About tab

The About tab displays brief software information and copyright statement, and provides relevant links for its terms of use. You may also use this tab to check for software updates, or as quick access to Razer's social communities.

7. SAFETY AND MAINTENANCE

SAFETY GUIDELINES

To achieve maximum safety while using your Razer Mouse Dock Pro, we suggest that you adopt the following guidelines:

- Should you have trouble operating the device properly and troubleshooting does not work, unplug the device and contact the Razer hotline or go to support.razer.com for support.
- Don't take apart the device, and don't attempt to operate it under abnormal current loads. Doing so will void your warranty.
- The Razer Mouse Dock Pro requires a USB connection that can supply sufficient power to charge a Razer wireless charging-compatible mouse. The charging process may be affected when connecting to a non-powered USB hub or non-powered USB, mostly found on keyboards and peripherals.
- Don't use or place the device near water, moisture, or other wet surfaces.
- Don't use or place the device near any heat, naked flame, or other hot surfaces such as radiators, stoves, fireplaces, and candles.
- The device should only be used with compatible Razer wireless charging-enabled mice. Please check if your device is compatible with the mouse dock before charging. Razer shall not be responsible for any damages incurred to any device when using the mouse dock.
- The device should only be operated using the type of power source indicated on the device. If you're unsure of the power source, please consult the local power company or a qualified technician.
- Keep the device away from liquid, humidity, or moisture. Operate the device only within the specific temperature range of 0°C (32°F) to 40°C (104°F). Should the temperature exceed this range, unplug and/or switch off the device to stabilize the temperature to an optimal level.

MAINTENANCE AND USE

The Razer Mouse Dock Pro requires minimum maintenance to keep it in optimum condition. Once a month, we recommend you clean the device using a soft cloth or cotton swab to prevent dirt buildup. Don't use soap or harsh cleaning agents.

8. LEGALESE

COPYRIGHT AND INTELLECTUAL PROPERTY INFORMATION

©2022 Razer Inc. All rights reserved. Razer, the triple-headed snake logo, Razer logo, "For Gamers. By Gamers.", and "Razer Chroma" logo are trademarks or registered trademarks of Razer Inc. or affiliated companies in the United States and other countries. All other trademarks are the property of their respective owners.

Windows and the Windows logo are trademarks of the Microsoft group of companies.

Razer Inc. ("Razer") may have copyright, trademarks, trade secrets, patents, patent applications, or other intellectual property rights (whether registered or unregistered) concerning the product in this guide. Furnishing of this guide does not give you a license to any such copyright, trademark, patent or other intellectual property right. The Razer Mouse Dock Pro (the "Product") may differ from pictures whether on packaging or otherwise. Razer assumes no responsibility for such differences or for any errors that may appear. Information contained herein is subject to change without notice.

LIMITED PRODUCT WARRANTY

For the latest and current terms of the Limited Product Warranty, please visit [razer.com/warranty](https://www.razer.com/warranty).

LIMITATION OF LIABILITY

Razer shall in no event be liable for any lost profits, loss of information or data, special, incidental, indirect, punitive or consequential or incidental damages, arising in any way out of distribution of, sale of, resale of, use of, or inability to use the Product. In no event shall Razer's liability exceed the retail purchase price of the Product.

GENERAL

These terms shall be governed by and construed under the laws of the jurisdiction in which the Product was purchased. If any term herein is held to be invalid or unenforceable, then such term (in so far as it is invalid or unenforceable) shall be given no effect and deemed to be excluded without invalidating any of the remaining terms. Razer reserves the right to amend any term at any time without notice.