



RAZER AETHER STANDING LIGHT BARS

MASTER GUIDE


Make your gamer room truly shine with Razer Aether Lights. Powered by Razer Chroma™ RGB, customize and control them all from one convenient app to create the perfect setting for any scenario.

CONTENTS


1. WHAT'S INSIDE	3
2. WHAT'S NEEDED	4
3. LET'S GET YOU COVERED	4
4. SETTING IT UP	5
5. CUSTOMIZING THE LIGHTING	6
6. USING THE LIGHT BARS	9
7. CONFIGURING YOUR RAZER AETHER STANDING LIGHT BARS VIA RAZER SYNAPSE	11
8. SAFETY AND MAINTENANCE	21
9. LEGALESE	22

1. WHAT'S INSIDE

- Razer Aether Standing Light Bars

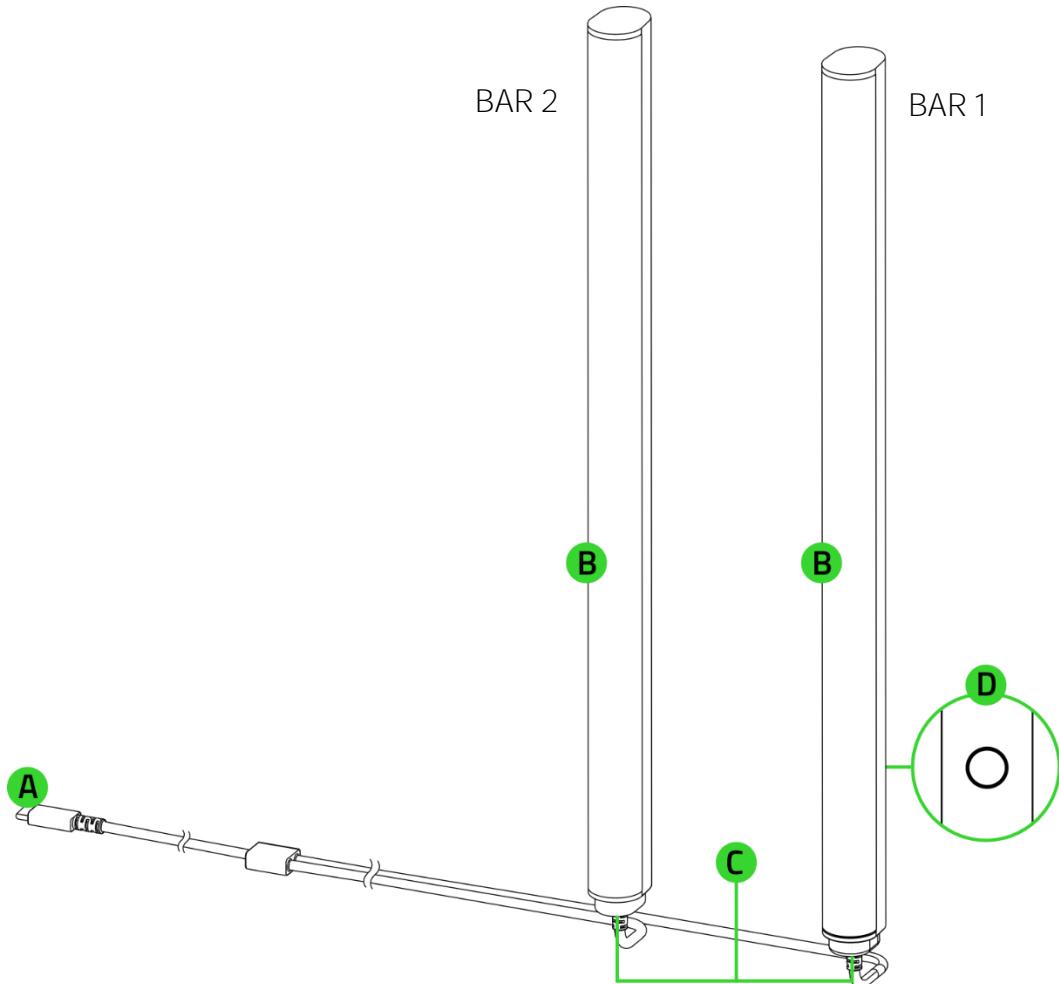

- A. USB Type C connector
- B. Reversible front-and-back dual lighting
- 2 x Light bar stands
- Important Product Information Guide

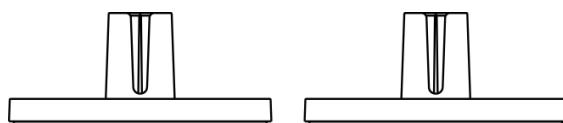

2. WHAT'S NEEDED

PRODUCT REQUIREMENTS

- USB Type C port
- 2.4 GHz WiFi network (WPA / WPA2 encryption)
- WiFi-enabled PC / Laptop (Windows® 10 64-bit or higher)*

RAZER GAMER ROOM APP REQUIREMENTS

- iOS 16.4 / Android 9 (or higher) device with Bluetooth connectivity*
- Internet connection for app installation

RAZER SYNAPSE REQUIREMENTS


- Windows® 10 64-bit (or higher)
- Internet connection for software installation

*Bluetooth connectivity required for initial setup only.

3. LET'S GET YOU COVERED




Register your product and score exclusive benefits
razerid.razer.com/warranty

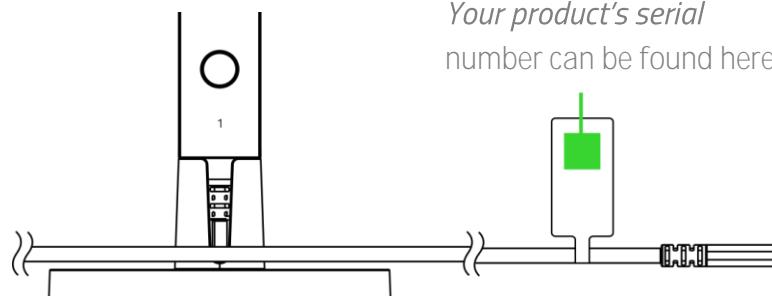


4. SETTING IT UP

1. Assemble.

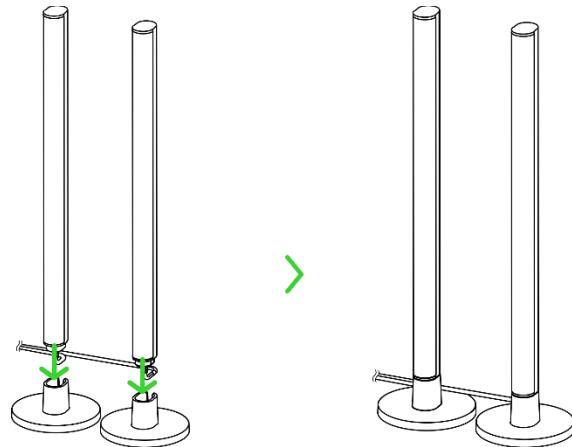


i The light bars can be oriented to face you or projected onto the walls, depending on your setup needs.

2. Position.

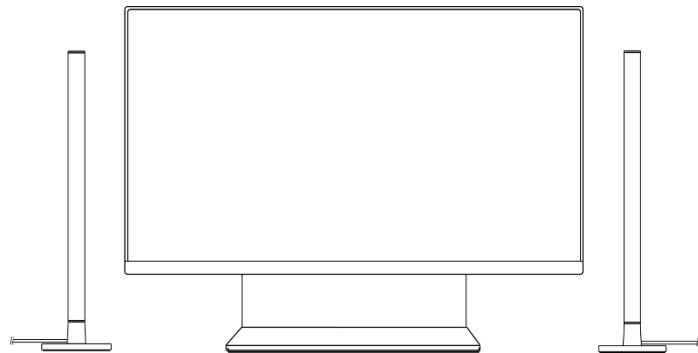

3. Connect.

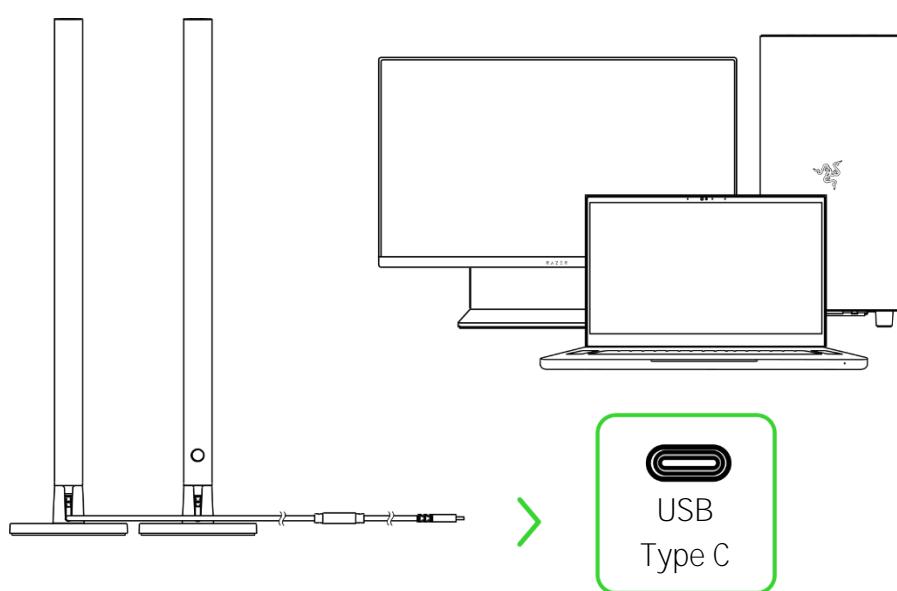

5. CUSTOMIZING THE LIGHTING

A. VIA MOBILE DEVICE USING THE RAZER GAMER ROOM APP (REQUIRED)

1.



Razer Gamer Room



RZR.TO/GAMER-ROOM-APP



2.

Power on



Press

3.



Razer Gamer Room



CREATE A HOME



ADD A NEW DEVICE




Launch the app and follow the onscreen instructions to add a new device. Please make sure your Razer device is in pairing mode and your mobile device is on your preferred 2.4 GHz network.

You can now customize the Razer Aether Standing Light Bars using the Razer Gamer Room app.

B. VIA PC / LAPTOP USING THE RAZER SYNAPSE APP

i Before proceeding, make sure the light bars are already set up on your network (via the Razer Gamer Room app) and your PC is on the same network.


1.

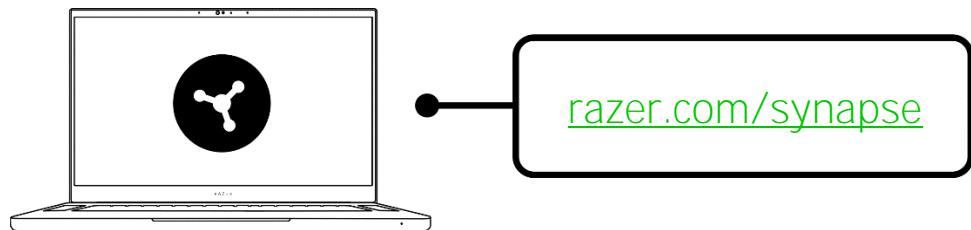

! Update Razer Synapse to its latest version or download its installer from razer.com/synapse. Registering for a Razer ID account is recommended but optional. You may continue as a guest; however, you won't be able to store any of your settings on the cloud.


2.

Power on



Press

3.

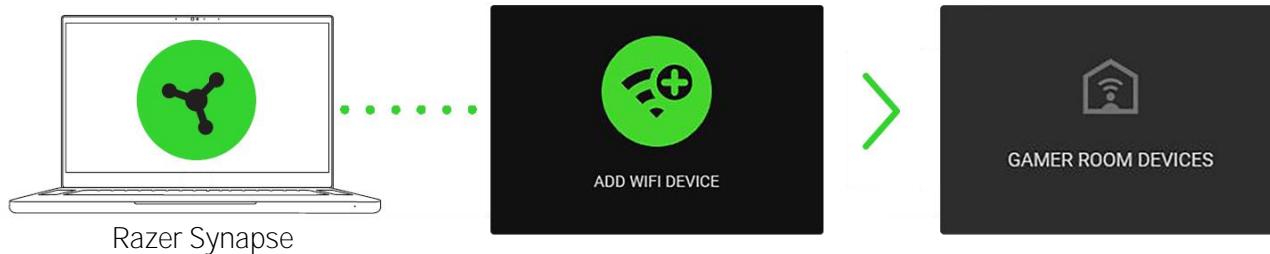

i Update Razer Synapse when prompted, and wait for Razer Synapse to set up the light bar.

You can now customize the Razer Aether Standing Light Bars using Razer Synapse.

REACTIVATING PAIRING MODE

Pairing mode is required when setting up the light bars from the Razer Gamer Room app. It activates when you power on the light bars and deactivates after 15 minutes if left unpaired. To reactivate, **switch off and on the light bars' power supply**.

6. USING THE LIGHT BARS

POWER ON/OFF

Power on / off



Press

CYCLING BETWEEN LIGHTING EFFECTS

While
powered on



Press and
hold*


STATIC (WHITE, RED, ORANGE, YELLOW, GREEN, CYAN, BLUE, PURPLE) > SPECTRUM
CYCLING > UPWARD WAVE > DOWNWARD WAVE

*Hold until the desired lighting effect is active.

RESETTING TO FACTORY SETTINGS

Once connected, a reset is required to connect the light bars to a new device.

1. While pressing and holding the Power / Multifunction button for more than 4 seconds, disconnect and reconnect the light bars.

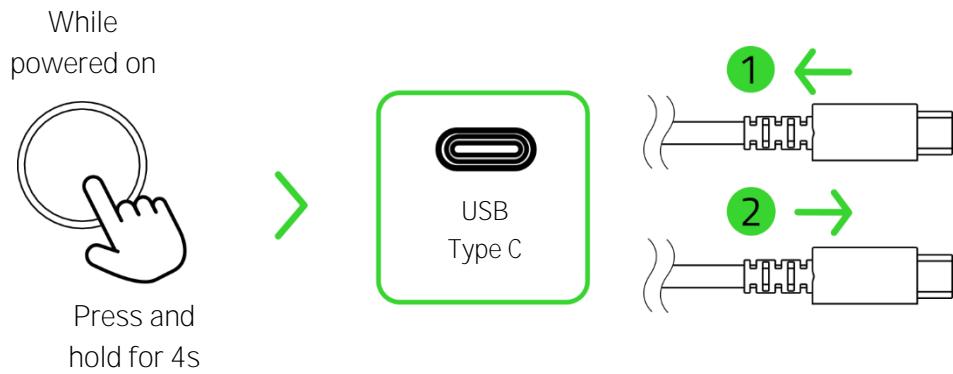

2. Wait for the light bars to briefly cycle through red, green, and blue before displaying the upward wave effect when the reset is successful.
3. Use the Razer Gamer Room app to connect the Razer Aether Standing Light Bars to a new mobile device.

7. CONFIGURING YOUR RAZER AETHER STANDING LIGHT BARS VIA RAZER SYNAPSE

i Disclaimer: This guide provides an overview of the New Razer Synapse app and may only partially cover some of the features of your device. The New Razer Synapse requires an Internet connection to install, update, access, and save cloud-based features. Registering for a Razer ID account is recommended but optional. All features listed here are subject to change based on the current version, connected device(s), and supported add-ons.

SYNAPSE TAB

The Synapse tab is your default tab when you first launch Razer Synapse. Use the following buttons below to navigate the user interface:

— Minimize

Clicking this button will minimize the app to the taskbar while it runs in the background.

 Maximize

This button expands the browser window to fill the entire screen. To restore the window to its original size, click the maximize button again.

 Close

This button will close all relevant tabs and terminate the application completely.

 Previous Tab

Clicking this button will return you to the last tab you have visited.

 Next Tab

Clicking this button will move you to the next page if you've recently used the Previous Tab button.

 Refresh Tab

This button reloads the current page. Use this if a page isn't displaying correctly or you want to see the latest content.

⬇️ Download Update

If this button appears, that means there are changes to the app. Use this if a page isn't displaying correctly or you want to see the latest content.

⋮ More

Clicking this button will open a pop-up so you can easily access your Devices, Modules, and Other Installed Apps tabs.

⚙️ Settings

Clicking this button will open the Settings tab, so you can quickly change the settings to this app.

👤 Profile


This button will open a pop-up to access the Log In, Feedback, Rate This Software, Add WiFi Device, and Exit options.

❓ Info

Hovering over this button will pop up an additional information about a feature or function.


Dashboard

The Dashboard subtab is an overview of your Razer Synapse, where you can access all your Razer devices, modules, and online services.

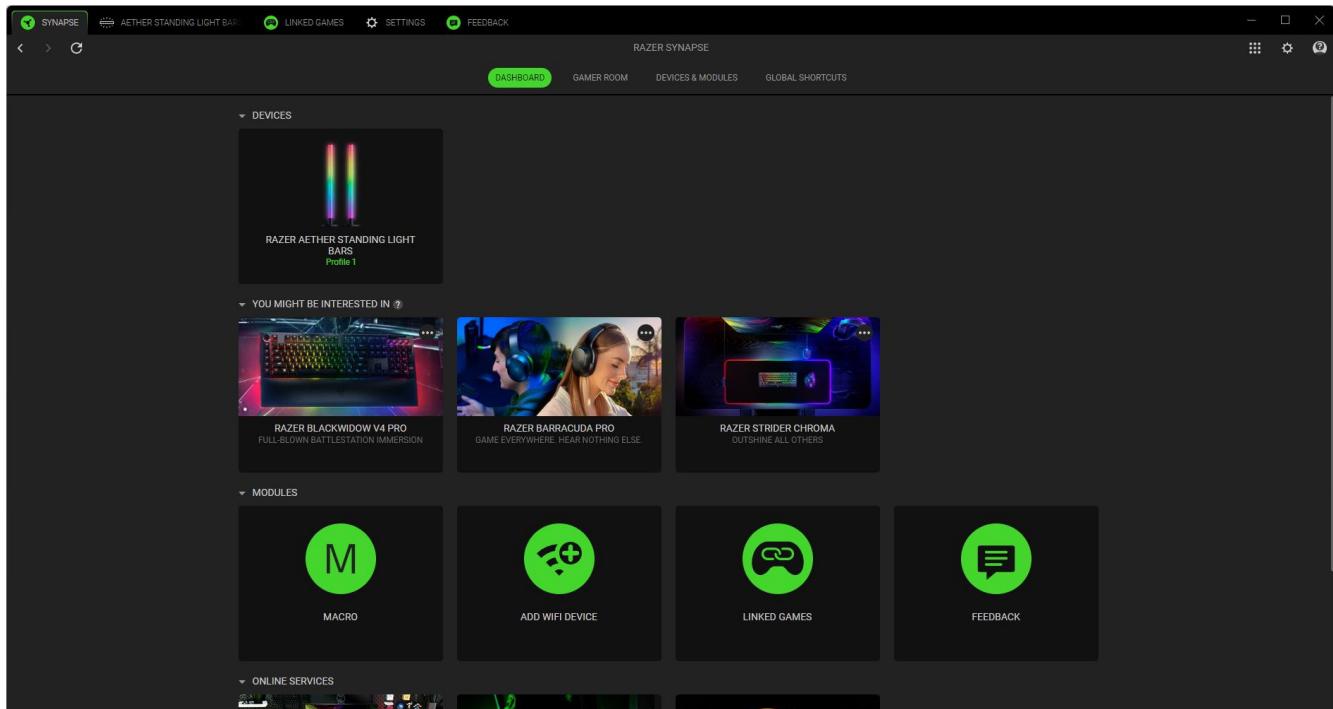

Gamer Room

The Gamer Room subtab shows all devices with the Razer Aether Light feature. From here, you can view and manage your Gamer Room-supported devices.

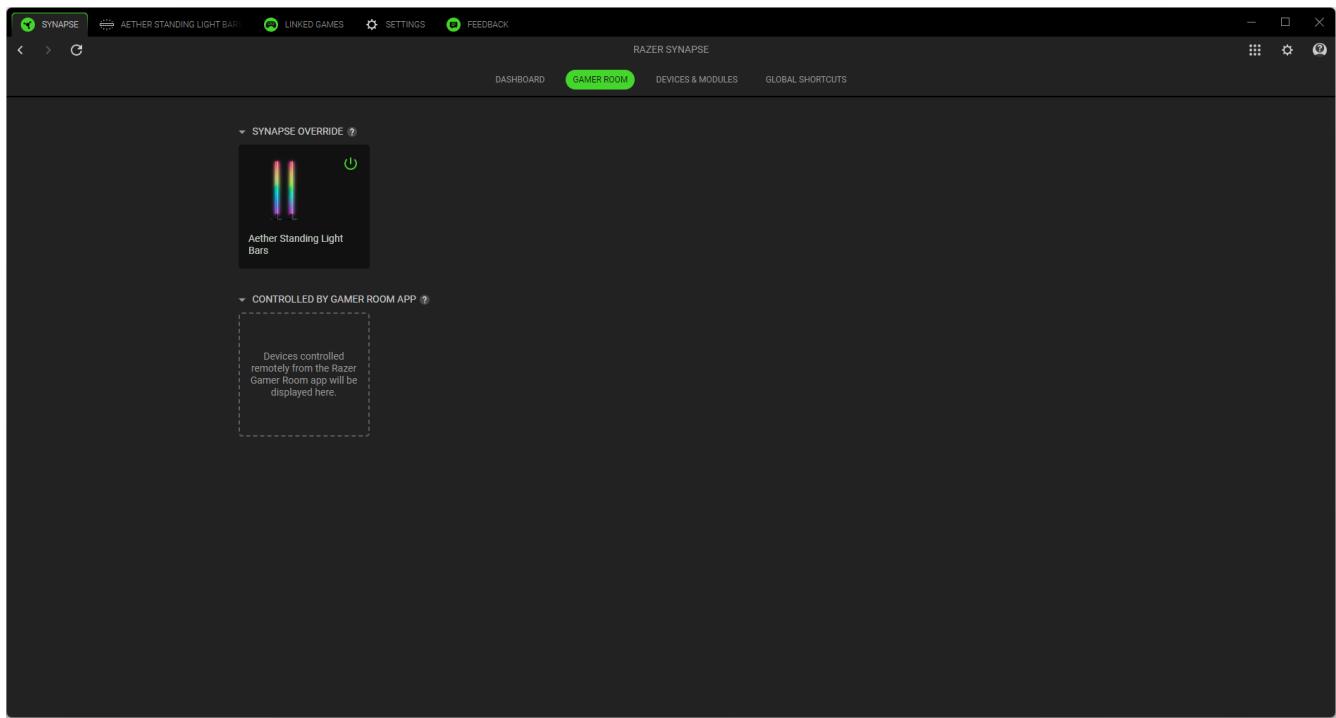

Synapse Override


This section allows you to select and customize your device's lighting and make it react to Chroma-enabled games and Chroma Connect apps using Razer Synapse.

Controlled By Gamer Room App

This section displays all supported devices controlled remotely by the Gamer Room app.

Devices & Modules


The Modules subtab displays all installed and available modules for installation.

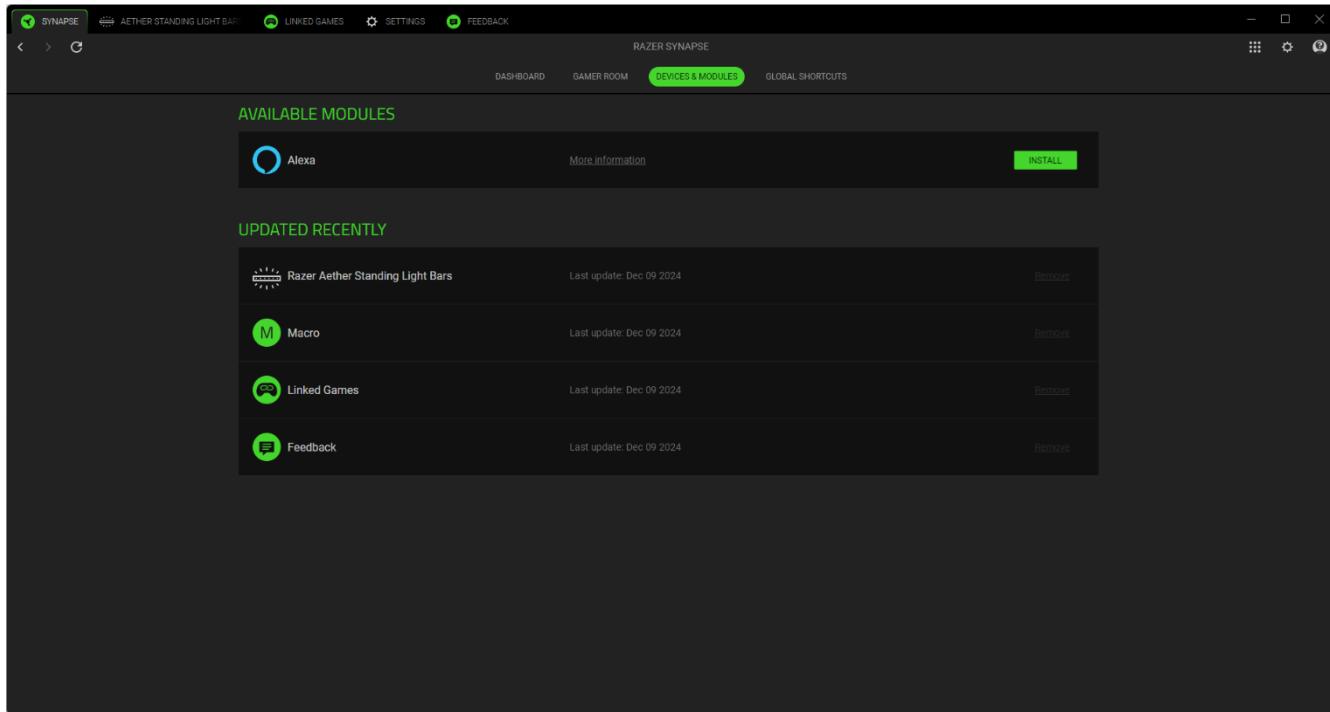

Global Shortcuts

Bind operations or Razer Synapse functions to custom key-combinations from any Razer Synapse-enabled device inputs, which apply across all device profiles.

! Only Razer Synapse-enabled device inputs will be recognized.

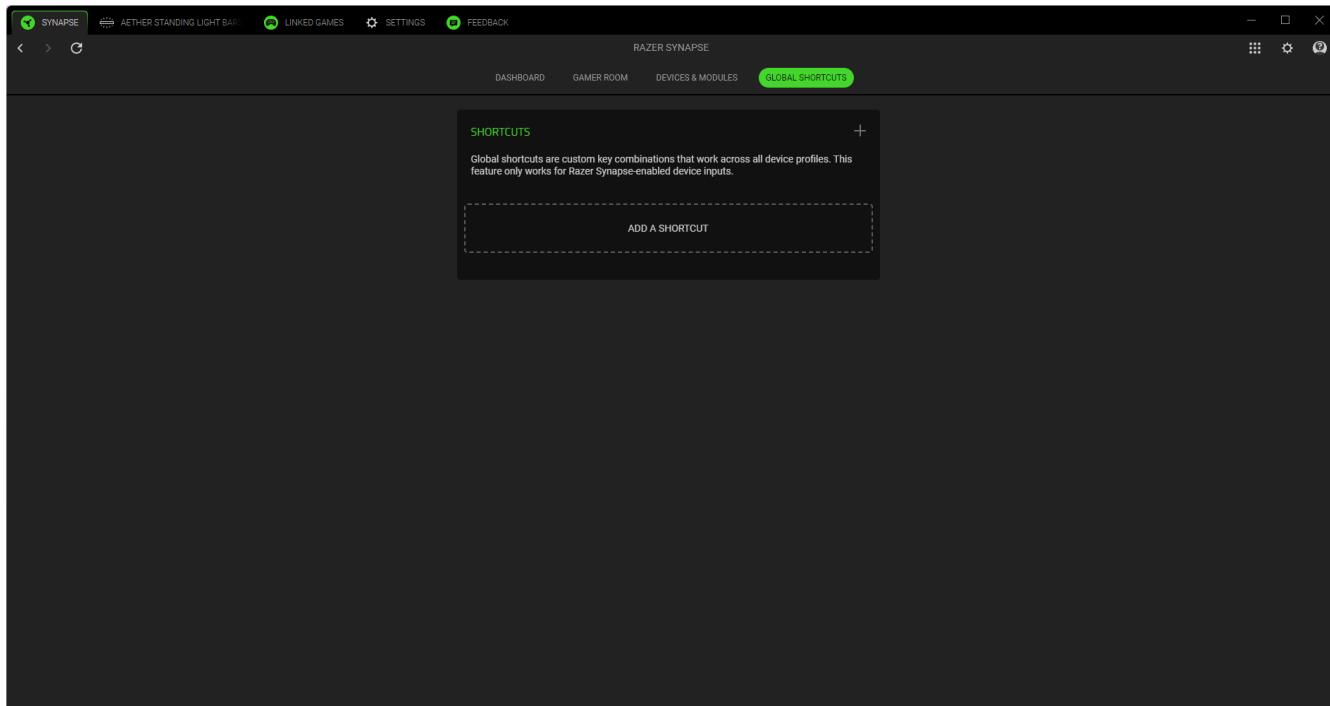

AETHER STANDING LIGHT BARS

The AETHER STANDING LIGHT BARS tab is the main tab for your Razer device. You can change your device settings from here, such as lighting. Any changes under this tab will be saved automatically to your local system and cloud storage. Use the following buttons below to access your profile options:

Profiles Dropdown Bar


Clicking this dropdown bar will display all the profiles for this device so you can quickly change profiles.

... Miscellaneous

Clicking this button will open a pop-up with options related to your current profile.

Lighting

The Lighting subtab allows you to customize your Razer device's lighting effects and manage how Razer Synapse controls them.

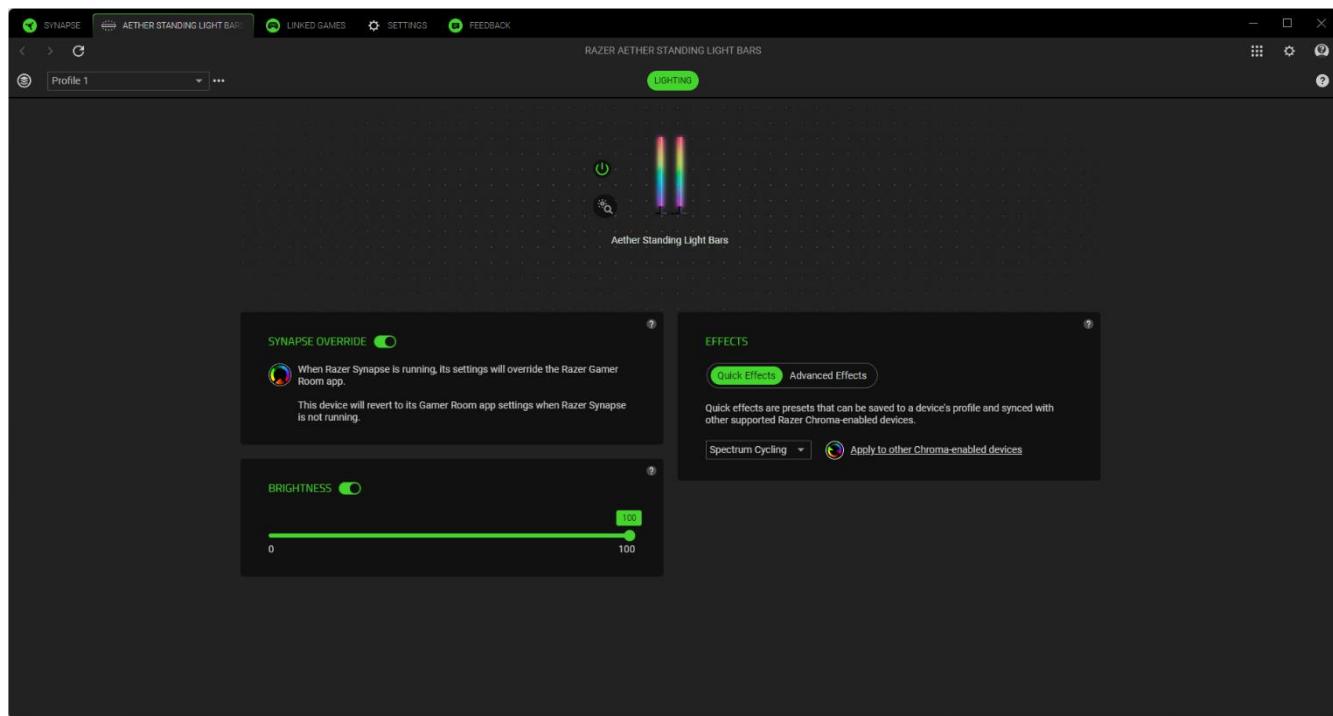

Profile

Profile is a data storage system that keeps all your Razer device's settings. By default, the profile name is based on your system's name. Clicking the dropdown bar () will display all profiles for this device so you can quickly switch between them. To add, import, rename, duplicate, export, or delete a profile, press the profile's corresponding Miscellaneous button (...).

Power on/off a device

You can turn your Razer device on or off by clicking the Power on/off button ().

Identifying a device

Click the Identify button () to show where your Razer device is in your physical setup.

Renaming a device

Assign your preferred name to your Razer device by clicking on the device name with the Rename cursor ().

Removing a device

Remove a Razer device from your setup by hovering the cursor on its image and clicking the Remove button ().

- Once removed, you must add the device again on Razer Synapse.

Synapse Override

Enable this setting to automatically take over and override Razer Gamer Room app settings whenever Razer Synapse is running.

Brightness

You can turn off your Razer device's lighting by toggling the Brightness option or increase/decrease the luminance using the slider.

Quick Effects

A number of quick effects can be selected and applied to your device's lighting, as listed here:

	Name	Description	How to set up
	Ambient awareness	The lighting will reflect the averaged color on the selected screen region	Select or customize a screen region
	Audio meter	The light bars will light up according to the audio level with a default spectrum of colors	Select a Color Boost level
	Breathing	The lighting will fade in and out of the selected color(s)	Select up to 2 colors or randomize colors

	Fire	The light bars will light up in warm colors to mimic the motion of flames	No further customization required
	Spectrum cycling	The light bars will cycle between 16.8 million colors indefinitely	No further customization required
	Starlight	The light bars will fade in and out using a random time and duration	Select up to 2 colors or randomize colors and select a duration
	Static	The lighting will remain lit in the selected color	Select a color
	Wave	The lighting will scroll in the direction selected	Select a wave direction

If you have other supported Razer Chroma-enabled devices, you can synchronize their quick effects with your Razer device by clicking the Chroma Sync button ().


Advanced Effects

The Advanced Effects option allows you to choose a Chroma Effect Profile you want to use on your Razer Chroma-enabled peripheral. To start making your own Chroma Effect Profile, press the Launch Chroma Studio button ().

 Some lighting effects listed here may not be available for your device. Only other Razer devices that support the selected lighting effect will synchronize.

LINKED GAMES


The Linked Games tab allows you to add apps, view peripherals linked to apps, or search for listed apps. You can also sort apps based on alphabetical order, last played, or most played. Apps will still be listed here, even if not linked to a Razer device. To add an app that is not listed on the screen, you can use the Add button (+) to search for it manually or use the Scan button (🔍) to search for it automatically. Click the Search button (🔍) to look for a specific game or program from the list.

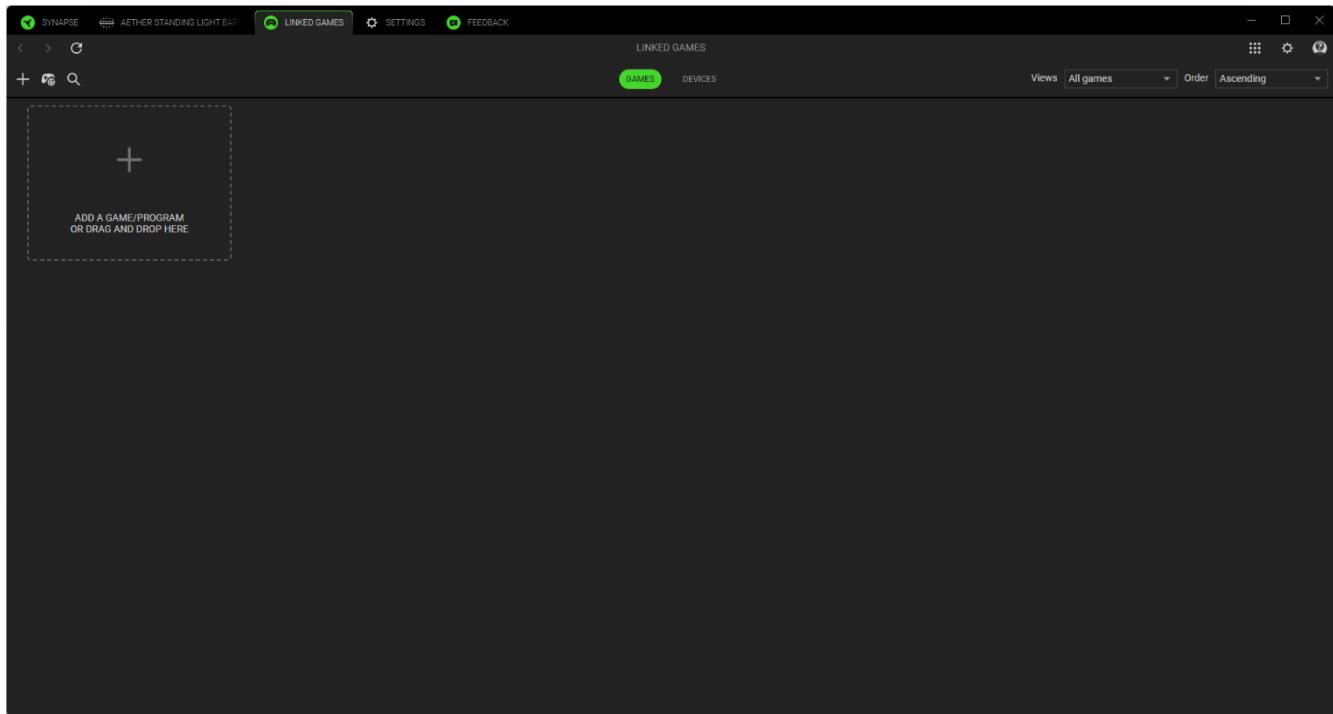

To link an app to your Razer device, click on it from the list and select a device and its profile. This will automatically set your device to the selected profile whenever you launch the app.

SETTINGS

The Settings tab, accessible by clicking the Settings button (⚙), enables you to configure numerous options as listed below:

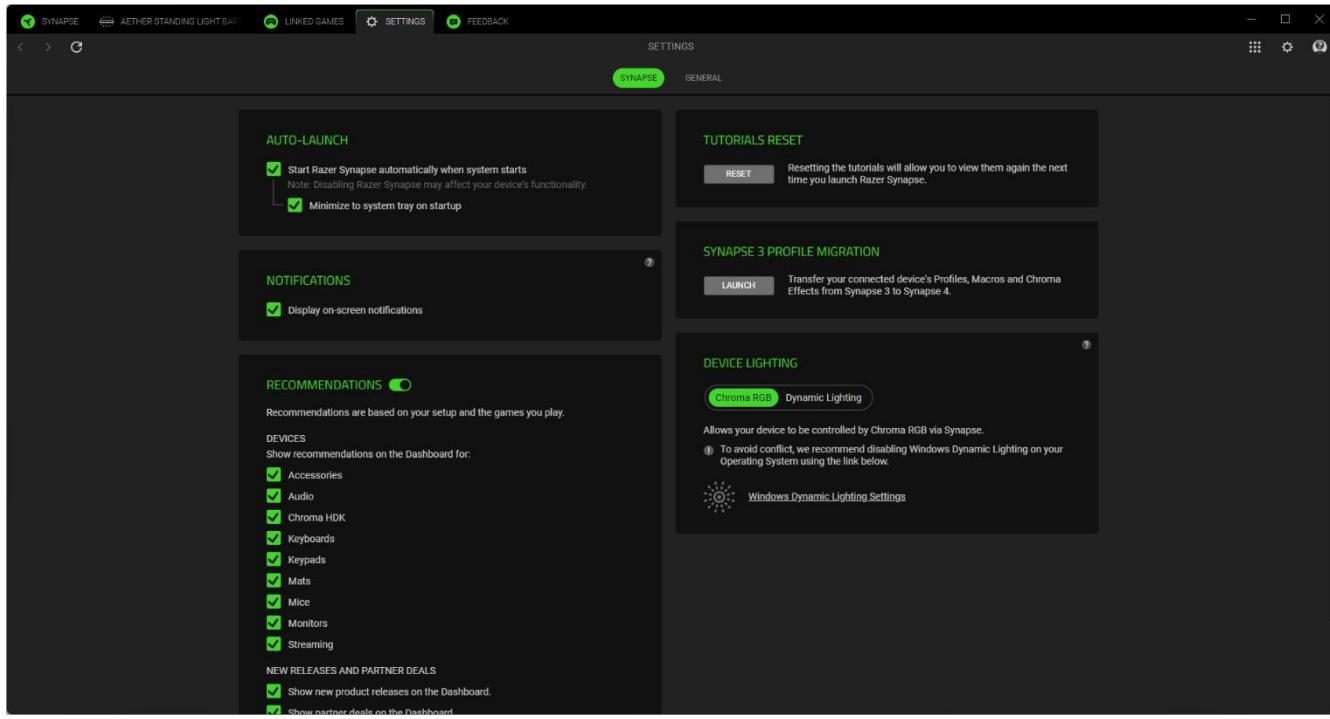

Auto Launch

The Auto Launch option allows you to configure the startup behavior of the app.

Notifications

The Notifications option allows the app to display on-screen notifications even if you run full-screen apps.

Recommendations

Recommendations enable us to show the latest products and features on your Dashboard based on your installed devices and linked games.

Tutorials Reset

Selecting the Reset button will reactivate all tutorials that help you acquaint yourself with Razer Synapse's features.

Profile Migration

Move all your connected Razer Synapse 3 Profiles, Macros, and Chroma effects to the New Razer Synapse.

Device Lighting

This option lets you choose which app will control the lighting effects on your device.

Language


This option lets you change the display language of Razer Synapse.

About

The About section shows the current software version, displays the copyright statement, and provides relevant links for Razer's terms of use. You may also use this option to quickly access Razer's social communities.

FEEDBACK

Help us improve Razer Synapse by giving your comments, suggestions, and problems with the software. You can contact us directly using this tab and even earn rewards for reporting bugs.

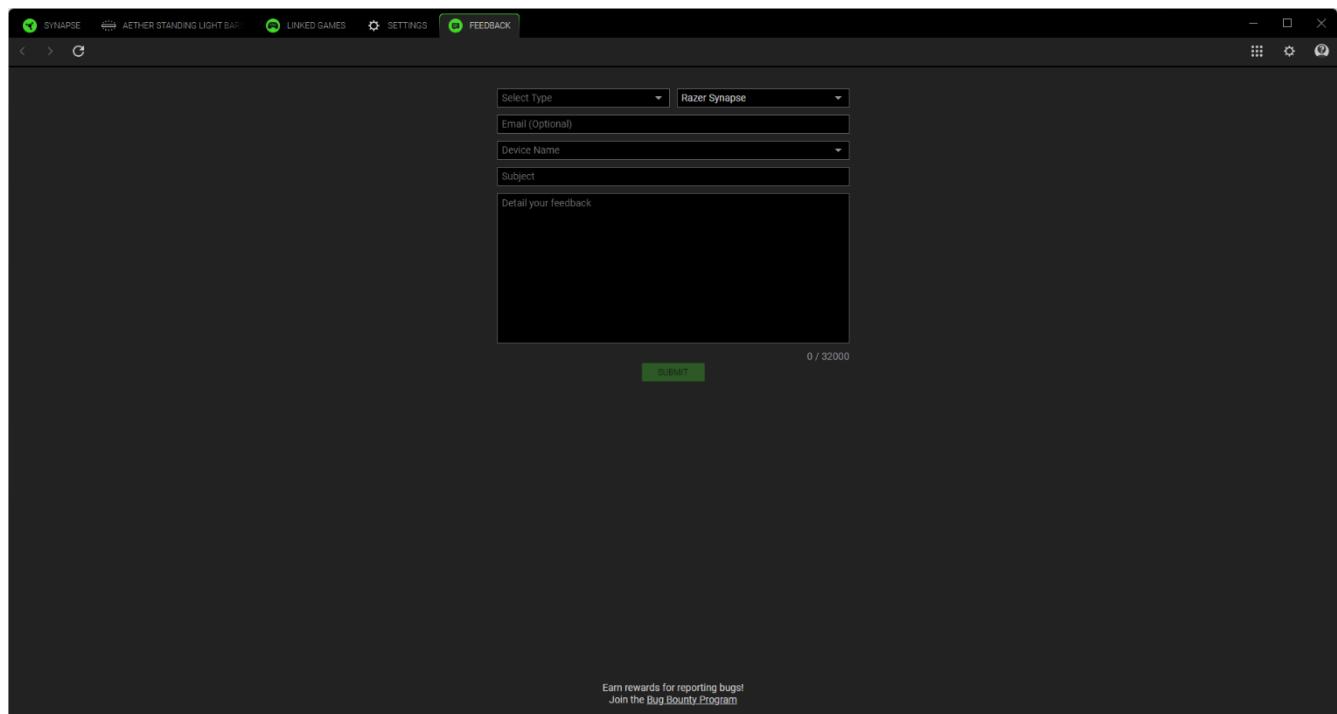

8. SAFETY AND MAINTENANCE

SAFETY GUIDELINES

To achieve maximum safety while using your Razer Aether Standing Light Bars, we suggest that you adopt the following guidelines:

- Should you have trouble operating the device properly and troubleshooting does not work, unplug the device and contact the Razer hotline or go to support.razer.com for assistance.
- Don't take apart the device and attempt to operate it under abnormal current loads. Doing so will void your warranty.
- Don't replace any of the light sources of this device. These should only be replaced by the manufacturer, service agent, or a similarly qualified person.
- Always make sure to securely fasten the light bars to their stands to prevent them from toppling over and causing harm or damage.
- Only set up and use the devices indoors.
- Don't use or install the device near water, moisture, solvents, or other wet surfaces, nor expose it to high temperatures or direct sunlight.
- **Don't bend or expose** any of the light bars to undue pressure.
- Keep the device away from liquid, humidity or moisture. Operate the device only within the specific temperature range of 0°C (32°F) to 40°C (104°F). Should the temperature exceed this range, unplug and/or switch off the device to stabilize the temperature to an optimal level.

MAINTENANCE AND USE

The Razer Aether Standing Light Bars requires minimum maintenance to keep it in optimum condition. Once a month, we recommend that you clean each light bar using a soft cloth to prevent dirt buildup. Don't use soap or harsh cleaning agents.

9. LEGALESE

COPYRIGHT AND INTELLECTUAL PROPERTY INFORMATION

©2025 Razer Inc. All rights reserved. Razer, the triple-headed snake logo, Razer logo, "For Gamers. By Gamers." and "Razer Chroma" are trademarks or registered trademarks of Razer Inc. and/or affiliated companies in the United States and other countries. Actual product may differ from pictures. All other trademarks are the property of their respective owners. Warranty not valid outside of product's intended region.

Android, Google, Google Logo, Google Play, and the Google Play logo are trademarks of Google LLC.

Apple, the Apple logo, and iPhone are trademarks of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc. iOS is a trademark or registered trademark of Cisco in the U.S. and other countries and is used under license.

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc., and any use of such marks by Razer is under license.

Windows and the Windows logo are trademarks of the Microsoft group of companies.

Razer Inc. ("Razer") may have copyright, trademarks, trade secrets, patents, patent applications, or other intellectual property rights (whether registered or unregistered) concerning the product in this guide. Furnishing of this guide does not give you a license to any such copyright, trademark, patent or other intellectual property right. The Razer Aether Standing Light Bars (the "Product") may differ from pictures whether on packaging or otherwise. Razer assumes no responsibility for such differences or for any errors that may appear. Information contained herein is subject to change without notice.

LIMITED PRODUCT WARRANTY

For the latest and current terms of the Limited Product Warranty, please visit razer.com/warranty.

LIMITATION OF LIABILITY

Razer shall in no event be liable for any lost profits, loss of information or data, special, incidental, indirect, punitive or consequential or incidental damages, arising in any way out of distribution of, sale of, resale of, use of, or inability to use the Product. In no event shall Razer's liability exceed the retail purchase price of the Product.

GENERAL

These terms shall be governed by and construed under the laws of the jurisdiction in which the Product was purchased. If any term herein is held to be invalid or unenforceable, then such term (in so far as it is invalid or unenforceable) shall be given no effect and deemed to be excluded without invalidating any of the remaining terms. Razer reserves the right to amend any term at any time without notice.